

GT'S 5-SERIES


Windows

Linux

Andorid

Touchscreen Computer

Attractive, flexible, reliable

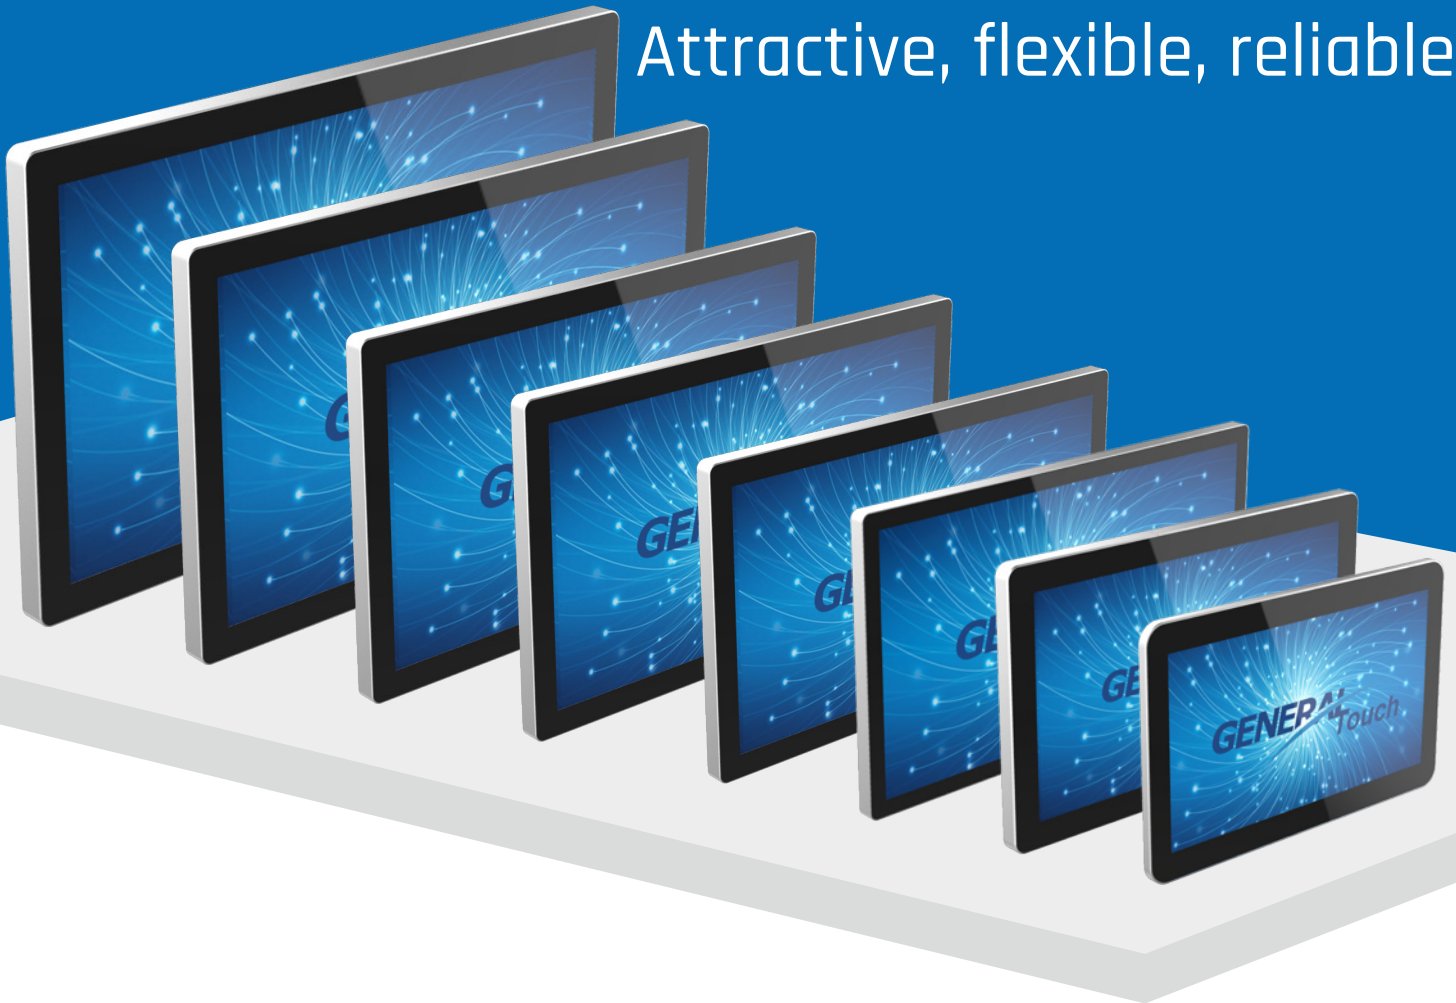

SEE IT

All in sharp, attractive on the full HD 1080p display in a pure flat screen with a stylish silver frame.

FEEL IT

The smooth, fast touch experience by latest high sensitive 10-point multi-touch technology.

World's leading provider of touch screen, touch monitor and All-in-one computer.

1080p HD

10-point multi-touch

All-Metal Body

Aluminum Alloy Frame

Designed for delivering an excellent user experience, the GT's 5-Series touchscreen computers use high sensitive 10-point multi-touch technology, with an immersive 1080p HD pure flat display.

All the products feature a unified stylish aluminum alloy frame and all-metal body, which ultimately enable 5-Series to be more durable and long-lasting.



POWER UP YOUR BUSINESS

Whether deployed in your commercial environments such as supermarkets, restaurants, or hospitality, whether as self-service kiosks, point-of-sale, digital signage, or conference screens, the 5-Series suits it all well.

Touch, swipe, and scroll with powerful Intel and Rockchip processors. In a 24-hours stable operation, the GT's 5-Series new touchscreen computer helps you do more and better.

KEY FEATURES

10-point multi-touch technology in rapid response

Beautiful aluminum alloy frame exemplary, full metal durable body

Full HD 1080p display with pure-flat screen from 12-inch to 55-inch

Windows, Linux or Android. You choose

Multiple interfaces for peripherals with standard VESA mount

Commercial grade usage be efficient and always ready (24h/7d)

2-year warranty worry-free

Product customization service driven by you



GT 5 SERIES FOR ANDROID

System -Android 7.1 or Android 9.0

Powerd by Rockchip 3288



Memory&Storage 2GB of RAM and 16GB ROM.

GT 5 SERIES FOR WINDOWS, LINUX

Powerd by Intel Celeron or 5th generation

Memory&Storage up to 8GB of RAM and 128GB ROM.

Available in
11.6, 15.6, 21.5, 23.8, 27, 32, 43, 55"

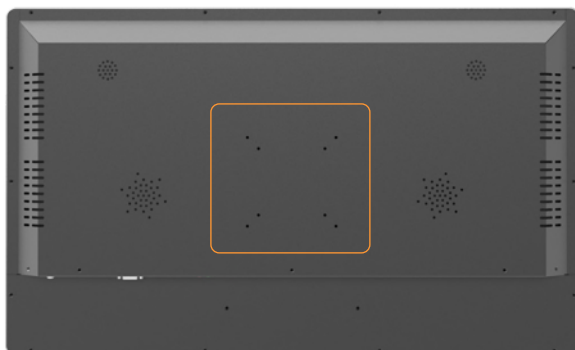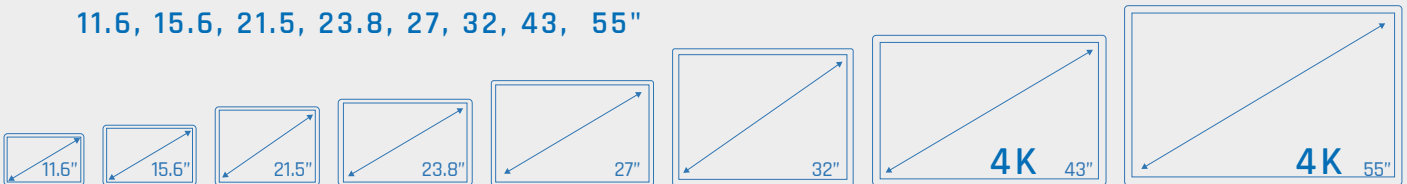

VESA HOLES

It Can be easily adapted to achieve your diverse installation needs by VESA holes. All products are rear-mounted with standard VESA mounting holes, whether wall-mounted, desktop or hanging, bracket arm and other mounting methods.



5-Series touchscreen computers have got the CE and FCC certificates, also we provide customized product certificate, and every product have been through a number of rigorous tests and carefully inspected before delivery.

2-YEAR WARRANTY

All 5-Series products



Drop test



Temperature Test

EMC

EMC test

ESD

ESD Test



Storage Test



Safety Test



Shock Test



Sand & Dust Test



Salt Spray Test




Over 20 years dedication to touch, General Touch is recognized by global customers for ultimate pursuit of profession and spirit of craftsman, our profession and suitable service links you no matter where you are, no matter the business is large or small.

SPECIFICATIONS

Model	Size	CPU	OS	Memory	Storage	Luminance (nits)	Viewing Angle (L/R/U/D)	Power Consumption (Typ)	VESA Mount (mm)	I / O
ABL115-RC1-2B00-102-1.0	11.6"	RK3288	Android 7.1	2G	16G	220	85° / 85° / 85° / 85°	30W	75 x 75	HDMI
ATL155-RC1-2B00-A02-1.0	15.6"	RK3288	Android 7.1	2G	16G	250	85° / 85° / 85° / 85°	30W	75 x 75 / 100 x 100	HDMI
ATL225-RC1-2B00-A02-1.0	21.5"	RK3288	Android 7.1	2G	16G	250	89° / 89° / 89° / 89°	40W	75 x 75 / 100 x 100	HDMI
ATL245-RC1-2B00-A02-1.0	23.8"	RK3288	Android 7.1	2G	16G	250	89° / 89° / 89° / 89°	40W	75 x 75 / 100 x 100	VGA / HDMI
ATL275-RC1-2B00-A02-1.0	27"	RK3288	Android 9.0	2G	16G	300	89° / 89° / 89° / 89°	45W	75 x 75 / 100 x 100	HDMI
ATL325-RC1-2B00-A02-1.0	32"	RK3288	Android 7.1	2G	16G	400	89° / 89° / 89° / 89°	60W	100 x 200	HDMI
CTL155-RCA-0B00-A0B-1.0	15.6"	J1900	Windows / Linux	4G	128G	250	85° / 85° / 85° / 85°	45W	75 x 75 / 100 x 100	VGA
CTL155-RCP-0B00-A0D-1.0	15.6"	i5-5200U	Windows / Linux	8G	128G	250	85° / 85° / 85° / 85°	50W	75 x 75 / 100 x 100	VGA / HDMI
CTL225-RCA-0B00-A0B-1.0	21.5"	J1900	Windows / Linux	4G	128G	250	89° / 89° / 89° / 89°	50W	75 x 75 / 100 x 100	HDMI / VGA
CTL225-RCP-0B00-A0D-1.0	21.5"	i5-5200U	Windows / Linux	8G	128G	250	89° / 89° / 89° / 89°	55W	75 x 75 / 100 x 100	HDMI / VGA
CTL225-RCP-2E00-A0D-1.0	21.5"	i5-5200U	Windows / Linux	8G	128G	250	89° / 89° / 89° / 89°	55W	75 x 75 / 100 x 100	HDMI / VGA
CTL245-RCP-0B00-A0D-1.0	23.8"	i5-5200U	Windows / Linux	8G	128G	250	89° / 89° / 89° / 89°	60W	75 x 75 / 100 x 100	HDMI / VGA
CTL275-RC0-0B00-A0D-1.0	27"	i3-5005U	Windows / Linux	8G	128G	300	89° / 89° / 89° / 89°	65W	75 x 75 / 100 x 100	HDMI / VGA
CTL275-RCP-0B00-A0D-1.0	27"	i5-5200U	Windows / Linux	8G	128G	300	89° / 89° / 89° / 89°	65W	75 x 75 / 100 x 100	HDMI / VGA
CTL325-RCP-0B00-A0D-1.0	32"	i5-5200U	Windows / Linux	8G	128G	400	89° / 89° / 89° / 89°	80W	100 x 200	VGA / HDMI
CTL437-RCP-2B00-30D-1.0	43"	i5-5200U	Windows / Linux	8G	128G	500	89° / 89° / 89° / 89°	110W	400 x 400	HDMI / VGA
CTL557-RCP-2B00-30D-1.0	55"	i5-5200U	Windows	8G	128G	350	89° / 89° / 89° / 89°	130W	400 x 400	HDMI / VGA

VARIETY OF INTERFACES

POWER RESET DC/12V LAN TF SIM HDMI USB OTG WIFI / BT

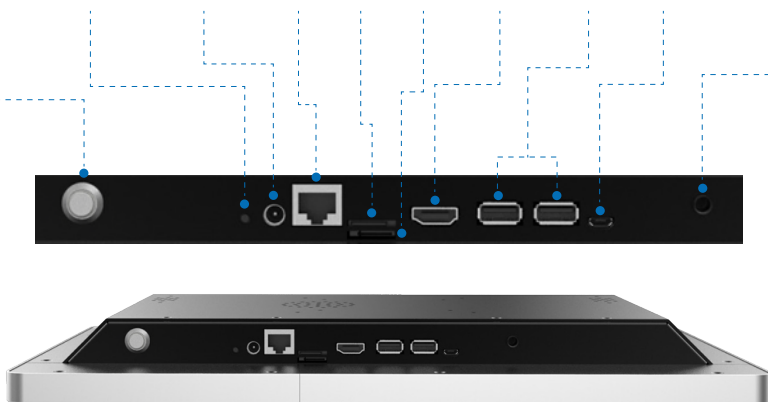

Speakers: Built-in Stereo Speakers

Webcam: Optional for CTL225 Models

Wireless: Bluetooth/Wi-Fi

I/O Ports

For Android Models

Ethernet 1x RJ45 2x USB 2.0 support

For Windows/Linux

01. Standard Models:
Ethernet 1xRJ45 2x USB 3.0 support
2x USB 2.0 support

02. Value Models:

Ethernet 1xRJ45 1x USB 3.0 support
3x USB 2.0 support



Create Your Idea GT's Touchscreen Computer.

Customization

Size Range	10.1, 15, 15.6, 17, 19, 21.5, 23.8, 27, 32, 43, 55"	
Touch Technology	PCAP (Projected Capacitive) / Infrared / SAW (Surface Acoustic Wave)	
ARM	OS	Android / 7.1 / 9.0 / 10.0
	CPU	Rockchip RK3288 / Rockchip RK3399 / Freescale i.MX6
	Memory	2G / 4G
	Storage	8G / 16G / 32G
	Network	RJ45 / WIFI / BT
PC Parameters		
X86	OS	Windows / Linux
	CPU	Intel Celeron J1900 / Intel Core i3, i5, i7
	Memory	4G / 8G / 16G / 32G
	Storage	64G / 128G / 256G SSD 500G / 1T HDD
	Network	RJ45 / WIFI / BT (Optional)
Operating Temperature	0 °C to 40 °C / -20 °C to 70 °C	
Storage Temperature	-20 °C to 70 °C	
Operating Humidity	20% to 80%	
Storage Humidity	10% to 90%	
Agency Approvals	CCC / CE / FCC / UL (Upon Customer Request)	