



Premium Product

- >High Brightness
- > Multi-touch
- >Precision Engineering

15 Inch Open Frame Touch Monitor (High Brightness)

OSL15S is a touchmonitor using industrial grade LED, High brightness, with low power consumption, ultra-thin body design, high resolution display and excellent multi-touch interactive experience. Compared to the average consumer TV or monitor, the OSL15S industrial-grade high performance and professional design is better suited for applications in industries such as retail, gaming, kiosk, self-service, finance, transit, conference, education and healthcare.


Features & Benefits

- P-Cap technology, Anti-Glare
- High brightness, Sunlight readable
- High-TNI
- Wide temperature
- light sensor
- Continues to work even with scratched touchscreen
- Easy integration and low maintenance
- Excellent performance, accuracy and reliability with drift-free operation

Applications

- Retail
- Gaming
- Medical
- Finance
- Self-service
- Transport
- Kiosk

High Brightness

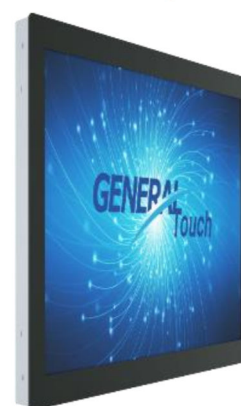

SPECIFICATIONS

Name	15 Inch Open Frame Touch Monitor
Model	OSL15S-RC8AA0-UDB1L0-1.0
LCD Panel Parameters	
Display Technology	Active Matrix TFT-LCD With LED Backlight
Aspect Ratio	4:3
Active Area (W x H)	304.13 × 228.1mm
Native Resolution	1024 × 768@60Hz
Response Time (Typ.)	30ms
Display Colors	16.7million
Luminance (Typ.)	1500nits; with P-Cap 1000nits(touch monitor)
Contrast Ratio (Typ.)	1000:1
Viewing Angle (Typ.)	Horizontal (left/right) CR≥10 89°/89°
	Vertical (up/down) CR≥10 89°/89°
Touch Screen Parameters	
Touch Technology	Projected Capacitive (P-Cap)
Surface Treatment	Strengthened and Anti-Glare
Active Area(W x H)	305.1 × 229.1 ± 0.3mm
Thickness(Total)	7.3 ± 0.3mm
Light Transmission	≥83%
Response Time	8~10ms
Touch Screen Interface	USB
Touch Point	10
Overall Parameters	
Mounting Options	Side Mounting, VESA: 75 × 75 mm
Outline Dimensions (W × H × D)	362.5mm × 289.5mm × 51.8mm
Power Supply	12V DC, Jet Ø2.5mm
On Screen Display (OSD)	Power, Auto, Up, Down, Menu
Power Consumption	MAX: 58W
Speaker	NA
Webcam	NA
Light sensor	Yes

Operating Altitude	≤3000m
Temperature Range & Humidity (Non Condensing)	Operating: -20°C to +60°C, Humidity 20% to 80%; Storage: -20°C to +70°C, Humidity 10% to 90%;
I/O	VGA, DVI, HDMI, DP, USB (Type B, for touch)
Accessories	Cables: VGA × 1, USB × 1, 1.5m Length
Carton Box Dimensions	550 × 450 × 175mm
Weight	Nct: 4.6kg Gross: 5.8kg
Agency Approvals	CE FCC
Warranty	1 year

Ordering Information

Model	Part Number	Description
OSL15S-RC8AA0-UDB1L0-1.0	110303571R	15", 4:3, 1500nits, P-Cap, USB, HDMI, light Sensor, Anti-Glare, High-TNI

Contact sales for other options

Optional Accessories

Model	Part Number	Description
Power Cord	130301888R	UK
	130301494R	EU 1500mm
	130301493R	US
HDMI Cord	130300881R	1500mm
DP Cord	130300932R	1500mm
Adaptor	130104010R	12V/7.5A, DC Cable: 1200mm, DC Jet Ø2.5mm

Go to www.generaltouch.com for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: info@generaltouch.com

<http://www.generaltouch.com>