


49 Inch

Curved Touchmonitor




OTJ497

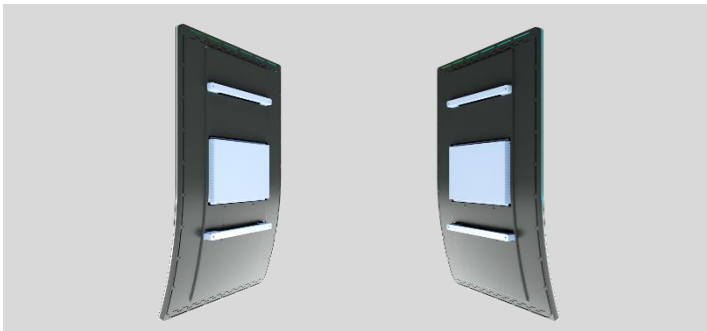

The novelty of curved touchmonitors brings an air of mystique to the display market. When LED-Framed lights are added, it easily becomes the prima donna of touch displays. General Touch mass produces these curved beauties in-house and they come in C, J or S curve-types with the classic curvature radius of R1500 in sizes ranging from 23.6 to 55 inches. To date, the 55 inch J-type has attained a breakthrough curvature radius of R800.

The large-sized 43-55 inch portrait curved touch screen provides an immersive and expansive user experience from top to bottom in diverse gaming and interactive scenarios. The medium-sized 23.6-32 inch landscape curved touch screen design is based on user-centered ergonomics, reducing fatigue in the human-computer interaction process, allowing users to play longer, fuller and happier.

General Touch offers both the Open Frame and Closed Frame curved displays. For a flushing appearance when integrated into a cabinet, the Open Frame is the straightforward choice. The Closed Frame allows the display to float on the surface of the cabinet though VESA and hinge mounting options, adding a tinge look of sophistication. When combined with Halo/Edge/Front LED-Framed lights, the curved display looks like it is dancing rhythmically. If a Closed Frame is in floating mount, adding rear LED lights would produce a silhouette effect.

- 
Gaming
- 
Kiosk
- 
Vending Machine

- Curved shape, J design, unique and interactive motivation
- No hot spot, dark spot, dark corner, high level uniformity
- Rear fire LEDs, glow style
- 4K resolution
- PCAP powered by General Touch, quality assurance
- Plastic back cover, light and cost saving
- Well sealed non LED light leakage
- Closed frame, compatible with various application

SPECIFICATIONS

| | |
|--------------------------------|---|
| Product Name | 49 Inch Curved Touchmonitor |
| Model | OTJ497 |
| LCD Panel Parameters | |
| Display Technology | Active Matrix TFT-LCD with LED Backlight |
| Aspect Ratio | 16:9 |
| Active Area (W x H) | 1073.78mm × 604.00mm |
| Native Resolution | 3840 × 2160 @ 60Hz |
| Response Time (Typ.) | 8ms |
| Display Colors | 1.07B |
| Luminance (Typ.) | 500nits |
| Contrast Ratio (Typ.) | 1100:1 |
| Viewing Angle (Typ.) | Horizontal: CR≥10 89°/89° Vertical: CR≥10 89°/89° |
| Touch Screen Parameters | |
| Touch Technology | PCAP |
| Surface Treatment | Tempered |
| Thickness (Total) | 4.5mm |
| Light Transmission | ≥ 83% |
| Response Time (Typ.) | 10ms |
| Touch Screen Interface | USB |
| Touch Point | 10 |
| Overall Parameters | |
| Case/Bezel Color | Black |
| Mounting Options | VESA: 600mm × 400mm |
| Outline Dimensions (W×H×D) | 692.0mm × 1150.0mm × 170.8mm, curvature radius 1493.4mm |
| Power Supply | Input Voltage Range: Monitor: +24 VDC ± 5%, 4 PIN plug or 6 PIN mating Molex 3901-2060 RGB LED Lights: +12VDC ± 5%, mating Molex 43025-0600 Optional LED controller (External): +12VDC ± 5%, Coaxial power jack 2.5mm pin outer diameter |
| On Screen Display (OSD) | Control (External): Power, Auto, Up, Down, Menu |
| Power Consumption (Max.) | 130W (Monitor without RGB LED Lights) 35W (RGB LED Lights) |
| Operating Altitude | ≤ 3000m |
| Temperature Range | Operating: 0°C to 40°C, storage: -20°C to 60°C |
| Humidity (Non Condensing) | Operating: 20% to 80%, storage: 10% to 90% |
| I/O | HDMI, HDMI, DP, USB (Type B) |
| Accessories | Cables: USB×1, 1.5m Length |

| | |
|---------------------------|--|
| Carton Box Dimensions | 1269mm (L) × 306mm (W) × 850mm (H), 1 unit in one carton |
| Weight | Net: 28kg, Gross: 35kg |
| MTBF | 50,000 hours demonstrated |
| LED Lights Color | Multicolor |
| LED Lights Location | 4 LED lights bar (Front, Edge & Back) |
| LED Controller (External) | Optional |
| Agency Approvals | CE, FCC |
| Warranty | 1 year |

| Ordering Information | | |
|--------------------------|--------------|---|
| Model | Part Number | Description |
| OTJ497-RC5000-UD5450-3.0 | 10202020099R | 49" "J type", UHD, 16:9, 500nits, PCAP, USB, HDMI/HDMI/DP, LED lights, front, edge & back |

| Optional Accessories | | |
|----------------------|--------------|--|
| Model | Part Number | Description |
| HDMI Cable | 30302030001R | HDMI Cable Male-Male 1500 mm |
| DP Cable | 30302010001R | DP Cable Male-Male 1500 mm |
| LED Controller Kit | 20701040010R | 12 V / 50 W Addressable LED Controller Kit |
| Adaptor | 30207010024R | Power Adapter 24 V / 150 W / 4 Pin / 1200 mm |
| Power Cable | 30301010018R | UK |
| | 30301010011R | EU 1500mm |
| | 30301010010R | US |

Go to www.generaltouch.com for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: info@generaltouch.com

<http://www.generaltouch.com>