
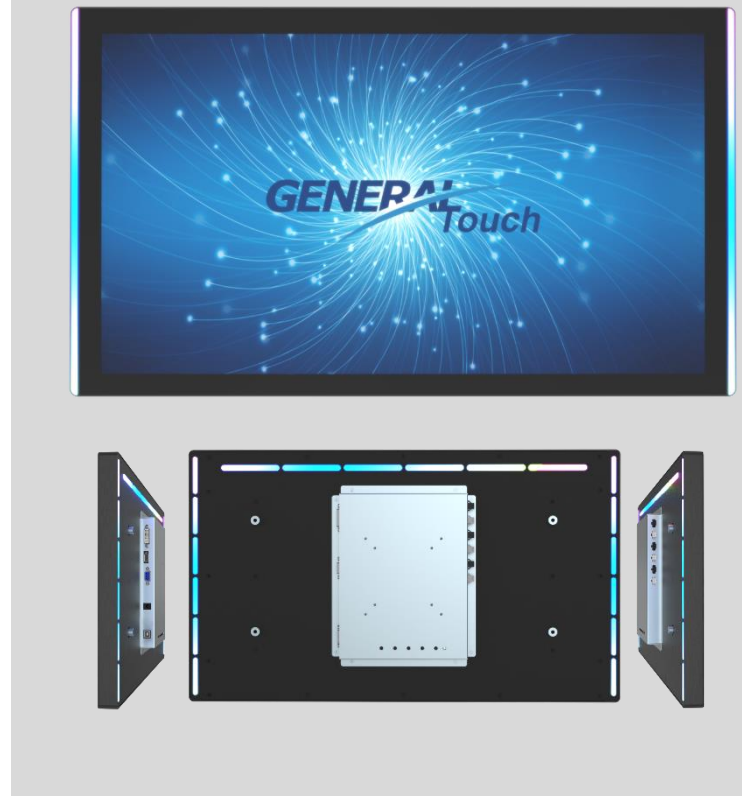


## 23.8 Inch

### LED-Framed Touchmonitor

#### OTL245

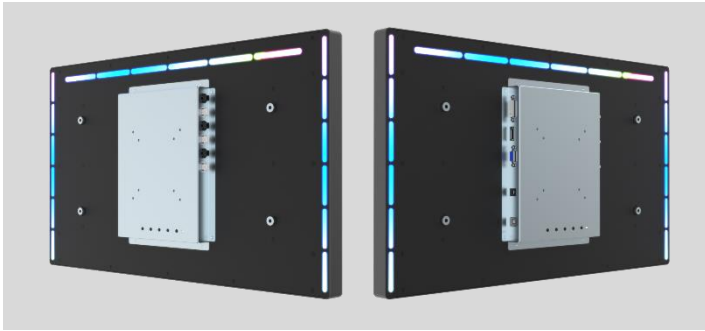

The LED-Framed touchmonitor dazzles with ambient lighting effects on the front and/or back of its sides. The color, style, and rhythm of the lights can be used as adornments, alerts, attractions, flags, indicators or fanfare that will surely boost the interactive functions of a touch display for both the users and operators.

To match different design styles, General Touch offers various LED light strip designs, including Front design with LED lights visible from the front, Edge design and Halo design with LED lights visible from the front and sides. The rear of the LED-Framed monitor has multiple design options too, such as rear-fire LED strips on four sides, U-shaped strips on three sides, or two parallel strips on the short or long edges. These combinations offer a wide variety of style and luster.

The GT LED-Framed touchmonitor stands out with their exceptional lighting effects, featuring no hot spots, dark spots, and dark corners, and ensuring a high level of uniformity with finely crafted, well-sealed, and free from LED light leakage. To facilitate customer control over the LEDs, GT provides protocols and controllers for customers to choose from. The LED controllers can be embedded or external, and it also supports customer-supplied controllers. The lighting effects offer dozens of standard modes and can be customized to meet specific customer requirements.

LED-Framed touchmonitors have been widely used in various scenes and domains, including gaming, kiosks, entertainment, EV chargers, meetings, and way-finding. The landscape, portrait, and VESA mounting options allow for quick and convenient integration with different environments, fulfilling customers' demands for high-quality dual interaction experiences.



Gaming



Kiosk



Vending  
Machine

- LED-Framed, Front design
- No hot spot, dark spot, dark corner, high level uniformity
- Rear fire LEDs, glow style
- PCAP powered by General Touch, quality assurance
- Metal frame, precisely and finely crafted
- Well sealed, non LED light leakage
- True flat, closed frame, compatible with various application

## SPECIFICATIONS

Product Name	23.8 Inch LED-Framed Touchmonitor
Model	OTL245
<b>LCD Panel Parameters</b>	
Display Technology	Active Matrix TFT-LCD with LED Backlight
Aspect Ratio	16:9
Active Area (W x H)	527.04mm × 296.46mm
Native Resolution	1920 × 1080 @ 60Hz
Response Time (Typ.)	14ms
Display Colors	16.7M
Luminance (Typ.)	250nits
Contrast Ratio (Typ.)	1000:1
Viewing Angle (Typ.)	Horizontal: CR≥10 89°/89°    Vertical: CR≥10 89°/89°
<b>Touch Screen Parameters</b>	
Touch Technology	PCAP
Surface Treatment	Tempered, Optional: Anti-Glare
Thickness (Total)	4.3mm
Light Transmission	≥ 83%
Response Time (Typ.)	8ms
Touch Screen Interface	USB
Touch Point	10
<b>Overall Parameters</b>	
Case/Bezel Color	Black
Mounting Options	VESA: 450mm × 150mm, 100mm × 100mm, 75mm × 75mm
Outline Dimensions (W×H×D)	583.20mm × 341.25mm × 50.10mm
Power Supply	Input Voltage Range: Monitor: +12VDC ± 5%, Coaxial power jack 2.5mm pin outer diameter RGB LED Lights: +5VDC ± 5%, SMP-03V Optional LED controller (External): +12VDC ± 5%, Coaxial power jack 2.5mm pin outer diameter
On Screen Display (OSD)	Control (Back): Power, Auto, Up, Down, Menu
Power Consumption (Max.)	30W (Monitor without RGB LED Lights) 30W (RGB LED Lights)
Operating Altitude	≤ 3000m
Temperature Range	Operating: 0°C to 40°C, storage: -20°C to 60°C
Humidity (Non Condensing)	Operating: 20% to 80%, storage: 10% to 90%
I/O	VGA, DVI, DP, USB (Type B)
Accessories	Cables: VGA × 1, USB × 1, 1.5m Length

Carton Box Dimensions	690mm (L) × 260mm (W) × 460mm (H), 2 units in one carton
Weight	Net: 8kg, Gross: 20kg
MTBF	50,000 hours demonstrated
LED Lights Color	Multicolor
LED Lights Location	2 LED lights bar (Front), 3 LED lights bar (Back) See drawing for details
LED Controller (External)	Optional
Agency Approvals	CE, FCC
Warranty	3 years

Ordering Information		
Model	Part Number	Description
OTL245-RC5000-UP2F20-1.0	10202010124R	23.8", 16:9, FHD, 250nits, PCAP, USB, VGA/DVI/DP, 2 LED lights bar (Front), 3 LED lights bar (Back)

Optional Accessories		
Model	Part Number	Description
DVI Cable	30302020002R	DVI Cable Male-Male 18+1 1500mm
DP Cable	30302010001R	DP Cable Male-Male 1500mm
LED Controller Kit	20701040008R	5V / 30W Addressable LED Controller Kit
Adapter	30207010005R	Power Adapter 12V / 50W / 2.5mm / 1500mm
Power Cable	30301010018R	UK
	30301010011R	EU
	30301010010R	US

Go to [www.generaltouch.com](http://www.generaltouch.com) for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: [info@generaltouch.com](mailto:info@generaltouch.com)

<http://www.generaltouch.com>