


32 Inch

Rear Mount Touchmonitor

RTL326

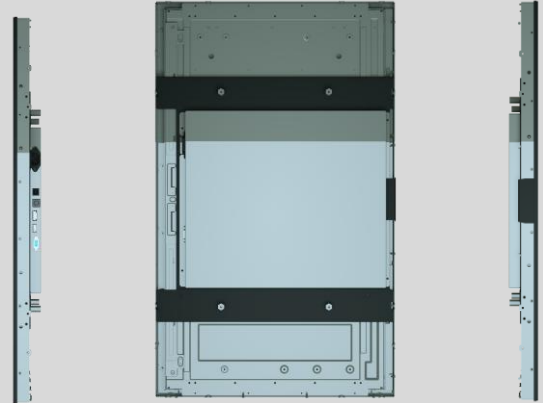

Jam-packed with advanced technical features, the latest General Touch Rear Mount Touchmonitor has been engineered to meet demanding operating environments without compromising its aesthetic appeal. Crafted with industrial-grade materials and precision molding, one could tell it could worth its weight in gold just by looking and handling it.

At its heart, an EETI chip drives its PCAP touch functions, coupled with an edge-to-edge cover glass that attains IP65 rating (Front surface) and easily survives the IK07 ball-drop test. This tough nut performs even in diverse and hostile environments. No wonder, not all PCAP touchscreens are created the same. In certain sizes, the PCAP touchscreen is optically bonded to its industrial grade LCD panel that spells unparalleled motion imagery in its class that is lifelike and immersive for any users.

Other desirable physical features include svelte profile, both DP and HDMI interfaces, external OSD menu control and versatile mounting options with adjustable brackets provided. Backed by GT's 3-year warranty, this Rear Mount PCAP Touchmonitor is pleasing to the eye, potent to work with and pleasurable to operate. With sizes ranging from 10.1 to 43 inches, GT's Rear Mount Touchmonitors can be proudly deployed in sectors like Retail, Entertainment, Financial Equipment, Self-service Kiosk, Lottery, Transport, Industrial Automation and more.



Kiosk



Gaming



Vending Machine



Industrial Automation

Features & Benefits

- Flexible installation choices and adjustable mounting brackets render the equipment seamlessly compatible
- The hardware modular design embodies a sleek and integrated aesthetic, exuding a sense of fashionable sophistication
- Front-facing, it achieves the esteemed IP65 rating
- Externally tethered OSD facilitates remote image adjustments
- Three-year warranty
- A comprehensive range of 10.1 to 43 inches, facilitating all-in-one procurement
- In-house production of exceptional touchscreens, suitable for a myriad of industries
- Certain sizes offer the option of optical bonding technology, providing a more authentic display

SPECIFICATIONS

Product Name	32 Inch Rear Mount Touchmonitor
Model	RTL326
LCD Panel Parameters	
Display Technology	Active Matrix TFT-LCD With LED Backlight
Aspect Ratio	16:9
Active Area (W x H)	698.4mm × 392.86mm
Native Resolution	1920 × 1080@60Hz
Response Time (Typ.)	8ms
Display Colors	16.7million
Luminance (Typ.)	500nits, with PCAP 415nits
Contrast Ratio (Typ.)	4000:1
Viewing Angle (Typ.)	Horizontal (left/right) CR≥10 89°/89°
	Vertical (up/down) CR≥10 89°/89°
Touch Screen Parameters	
Touch Technology	PCAP
Surface Treatment	Strengthened
	Optional: Anti-Glare
Active Area(W x H)	698.4mm × 392.86mm±0.3mm
Thickness(Total)	4.3mm±0.3mm
Light Transmission	≥83%
Response Time	10ms
Touch Screen Interface	USB
Touch Point	10
Overall Parameters	
Case/Bezel Color	Gray
Mounting Options	VESA: 400mm × 200 mm, Rear Mounting, Side Mounting
Outline Dimensions (W×H×D)	746.6mm × 452.0mm × 57.7mm
Power Supply	Input Voltage Range: 100~240V AC, 50~60Hz
On Screen Display (OSD)	Control (External): Power, Auto, Up, Down, Menu
Power Consumption	MAX: 60W
Speaker	NA
Webcam	NA

Operating Altitude	≤3000m
Temperature Range	Operating: 0 °C to 40 °C , Storage: -20 °C to 60 °C
Humidity (Non Condensing)	Operating: 20% to 80%, Storage: 10% to 90%
I/O	VGA, HDMI, DP, USB (Type B, For touch), Mini DIN (External OSD)
Accessories	Cables: VGA×1, USB×1, 1.5m Length, External OSD
Carton Box Dimensions	910mm (L) × 220mm (W) × 630mm (H)
Weight	Net: 14.5kg, Gross: 21.5kg
MTBF	50,000 hours demonstrated
Agency Approvals	CE, FCC
Warranty	3 years

Ordering Information

Model	Part Number	Description
RTL326-RC5E00-UD5200-1.0	10202010432R	32", 16:9, 500nits, PCAP, USB, VGA & HDMI & DP, Gray

Contact sales for other options

Optional Accessories

Model	Part Number	Description
Power Cable	30301010018R	UK
	30301010011R	EU 1500mm
	30301010010R	US
HDMI Cable	30302030001R	1500mm
DP Cable	30302010001R	1500mm

Go to www.generaltouch.com for more products and information, or contact us.

General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120

Fax: 0086-28-85124115

E-mail: info@generaltouch.com

<http://www.generaltouch.com>