

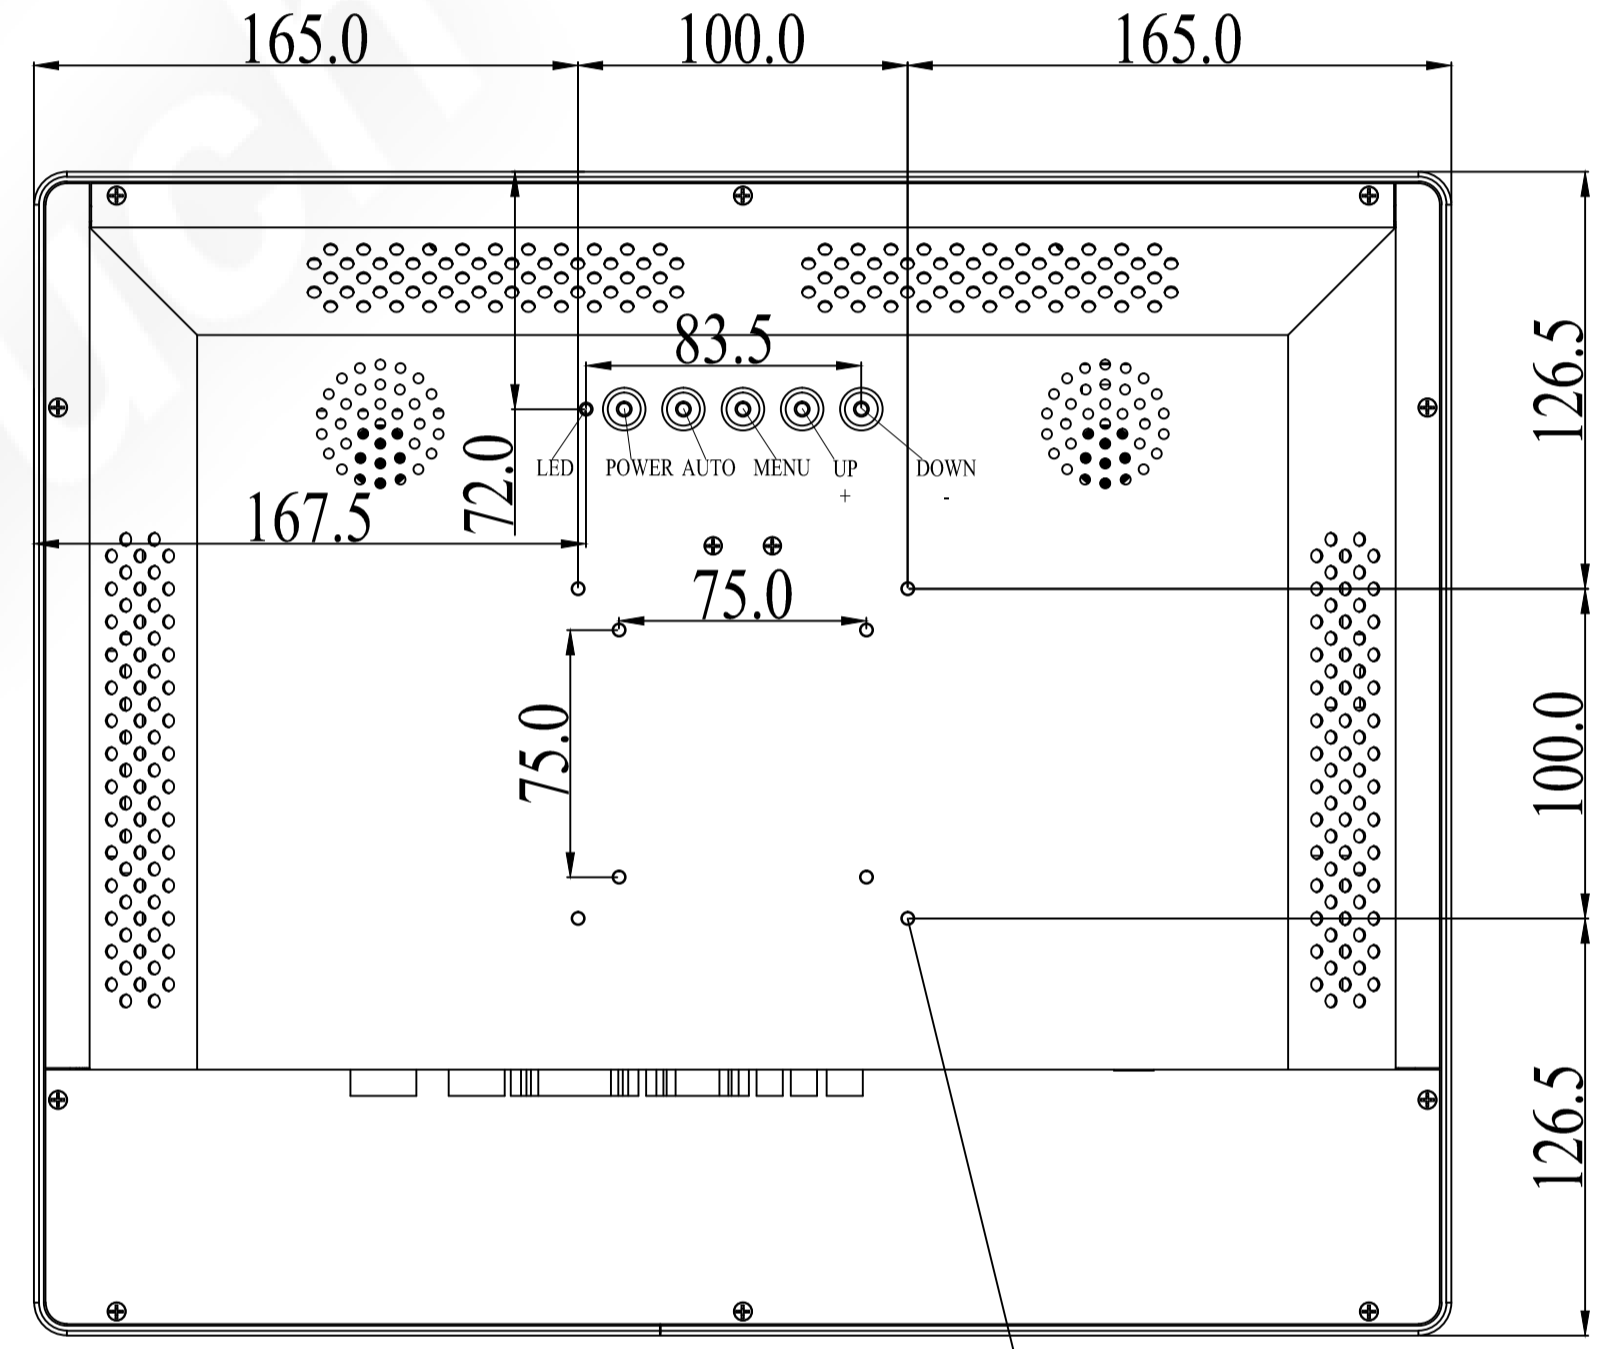


Title: OTL195-RPCZ05-UHPCD

|      |                  |           |
|------|------------------|-----------|
| Mark | Revised Contents | Signature |
| △    |                  |           |

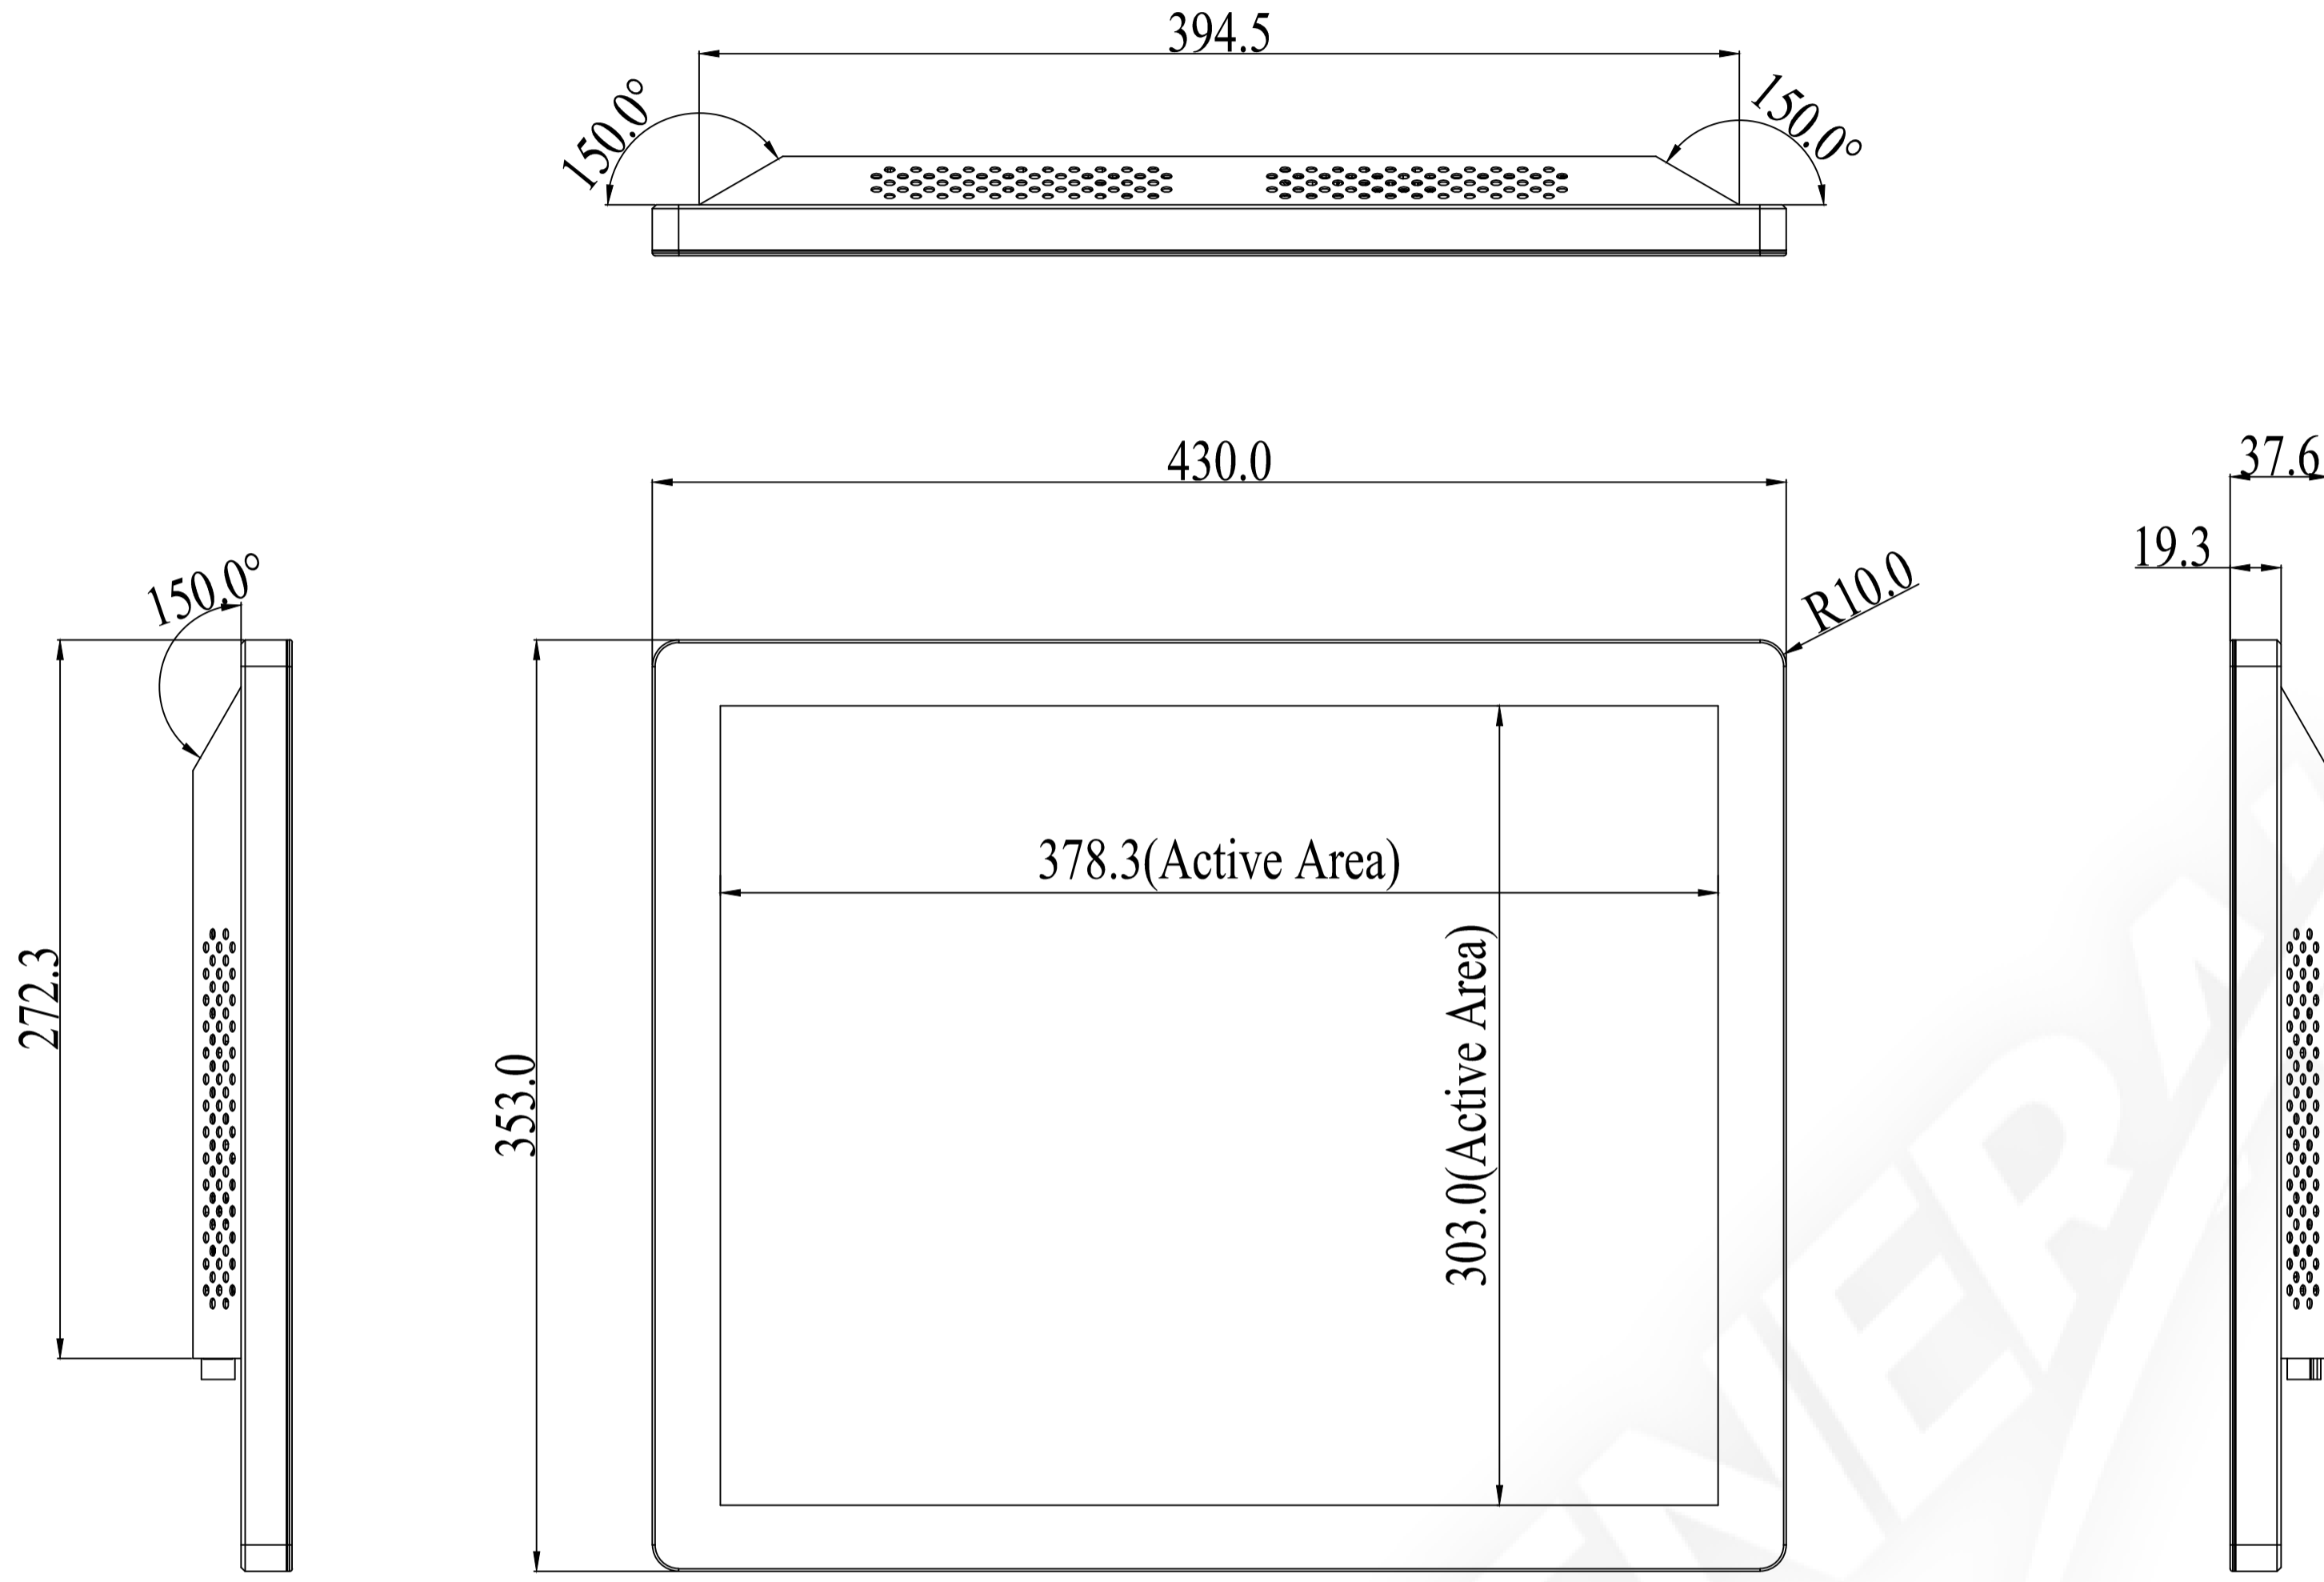

M4 Threads, X8  
Max Screw Depth=5mm  
From Mounting Surface

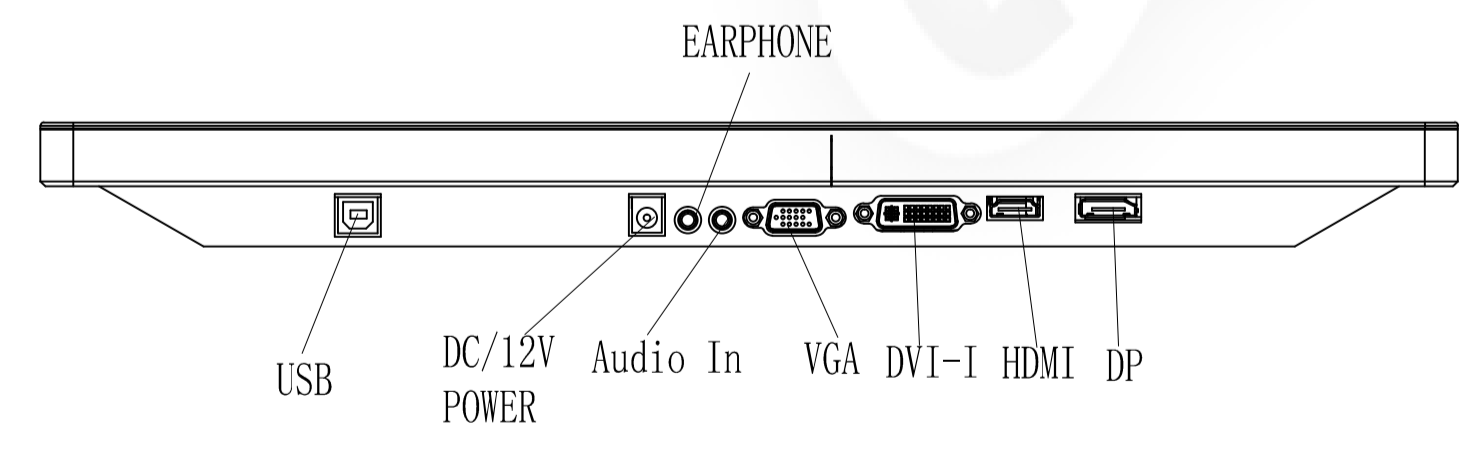

ALL DIMENSIONS ARE IN MILLIMETERS

|                      |                     |                        |   |  |                              |  |
|----------------------|---------------------|------------------------|---|--|------------------------------|--|
| <b>GENERAL Touch</b> |                     | GeneralTouch Co., Ltd. |   |  |                              |  |
| Specification        | External Dimensions | 430.0*353.0*37.6       | Anti-Glare  | Y <input type="checkbox"/> N <input checked="" type="checkbox"/> | Designer:<br>Zhou Bolin      |  |
| Unit                 | Date                | Active Area            | DustProof   | Y <input type="checkbox"/> N <input checked="" type="checkbox"/> |                              |  |
| mm                   | 2020/08/13          | Glass Thickness        |   |  | Checked By:<br>Wang Zhenghua |  |
| Projection:          |                     | Silk Print Color       |   |  |                              |  |
|                      |                     | Mounting               | VESA <input checked="" type="checkbox"/> Bracket <input type="checkbox"/> |  | Approved By:<br>Zhou Bolin   |  |
| Sheet 1 of 1         |                     | Notes                  |   |  |                              |  |
| VER: 1.0             | Scale: 1:1          | Touch Technology       | P-CAP   | <input checked="" type="checkbox"/>                              | SAW                          |  |
| Tolerance: ±1.0mm    |                     |                        | IR/PIT  |  | Resistive                    |  |
|                      |                     |                        | Non-Touch   |  |                              |  |