

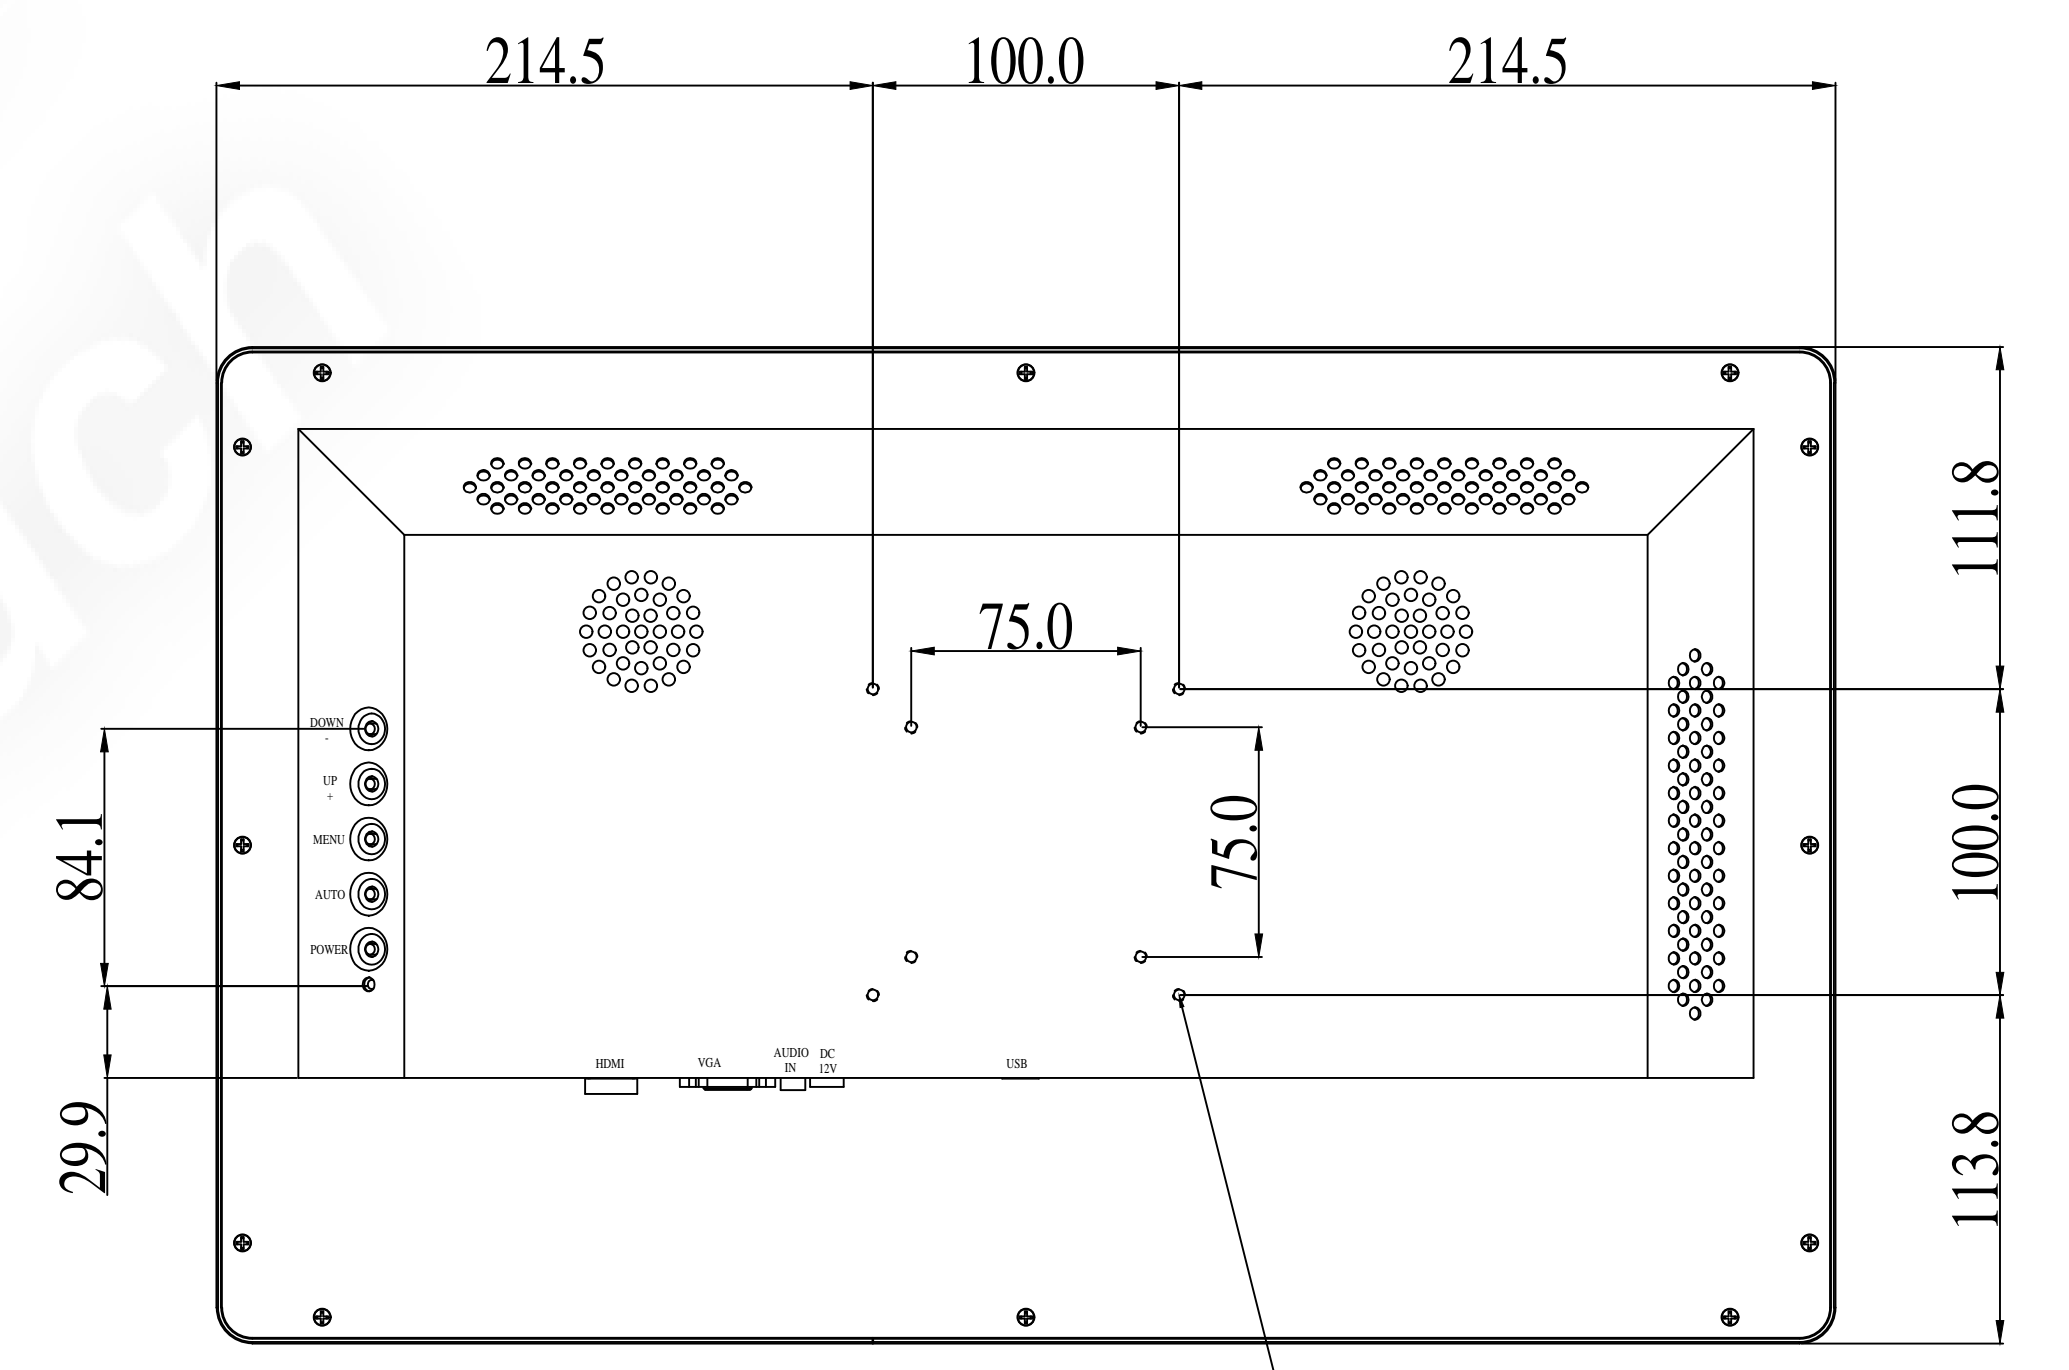
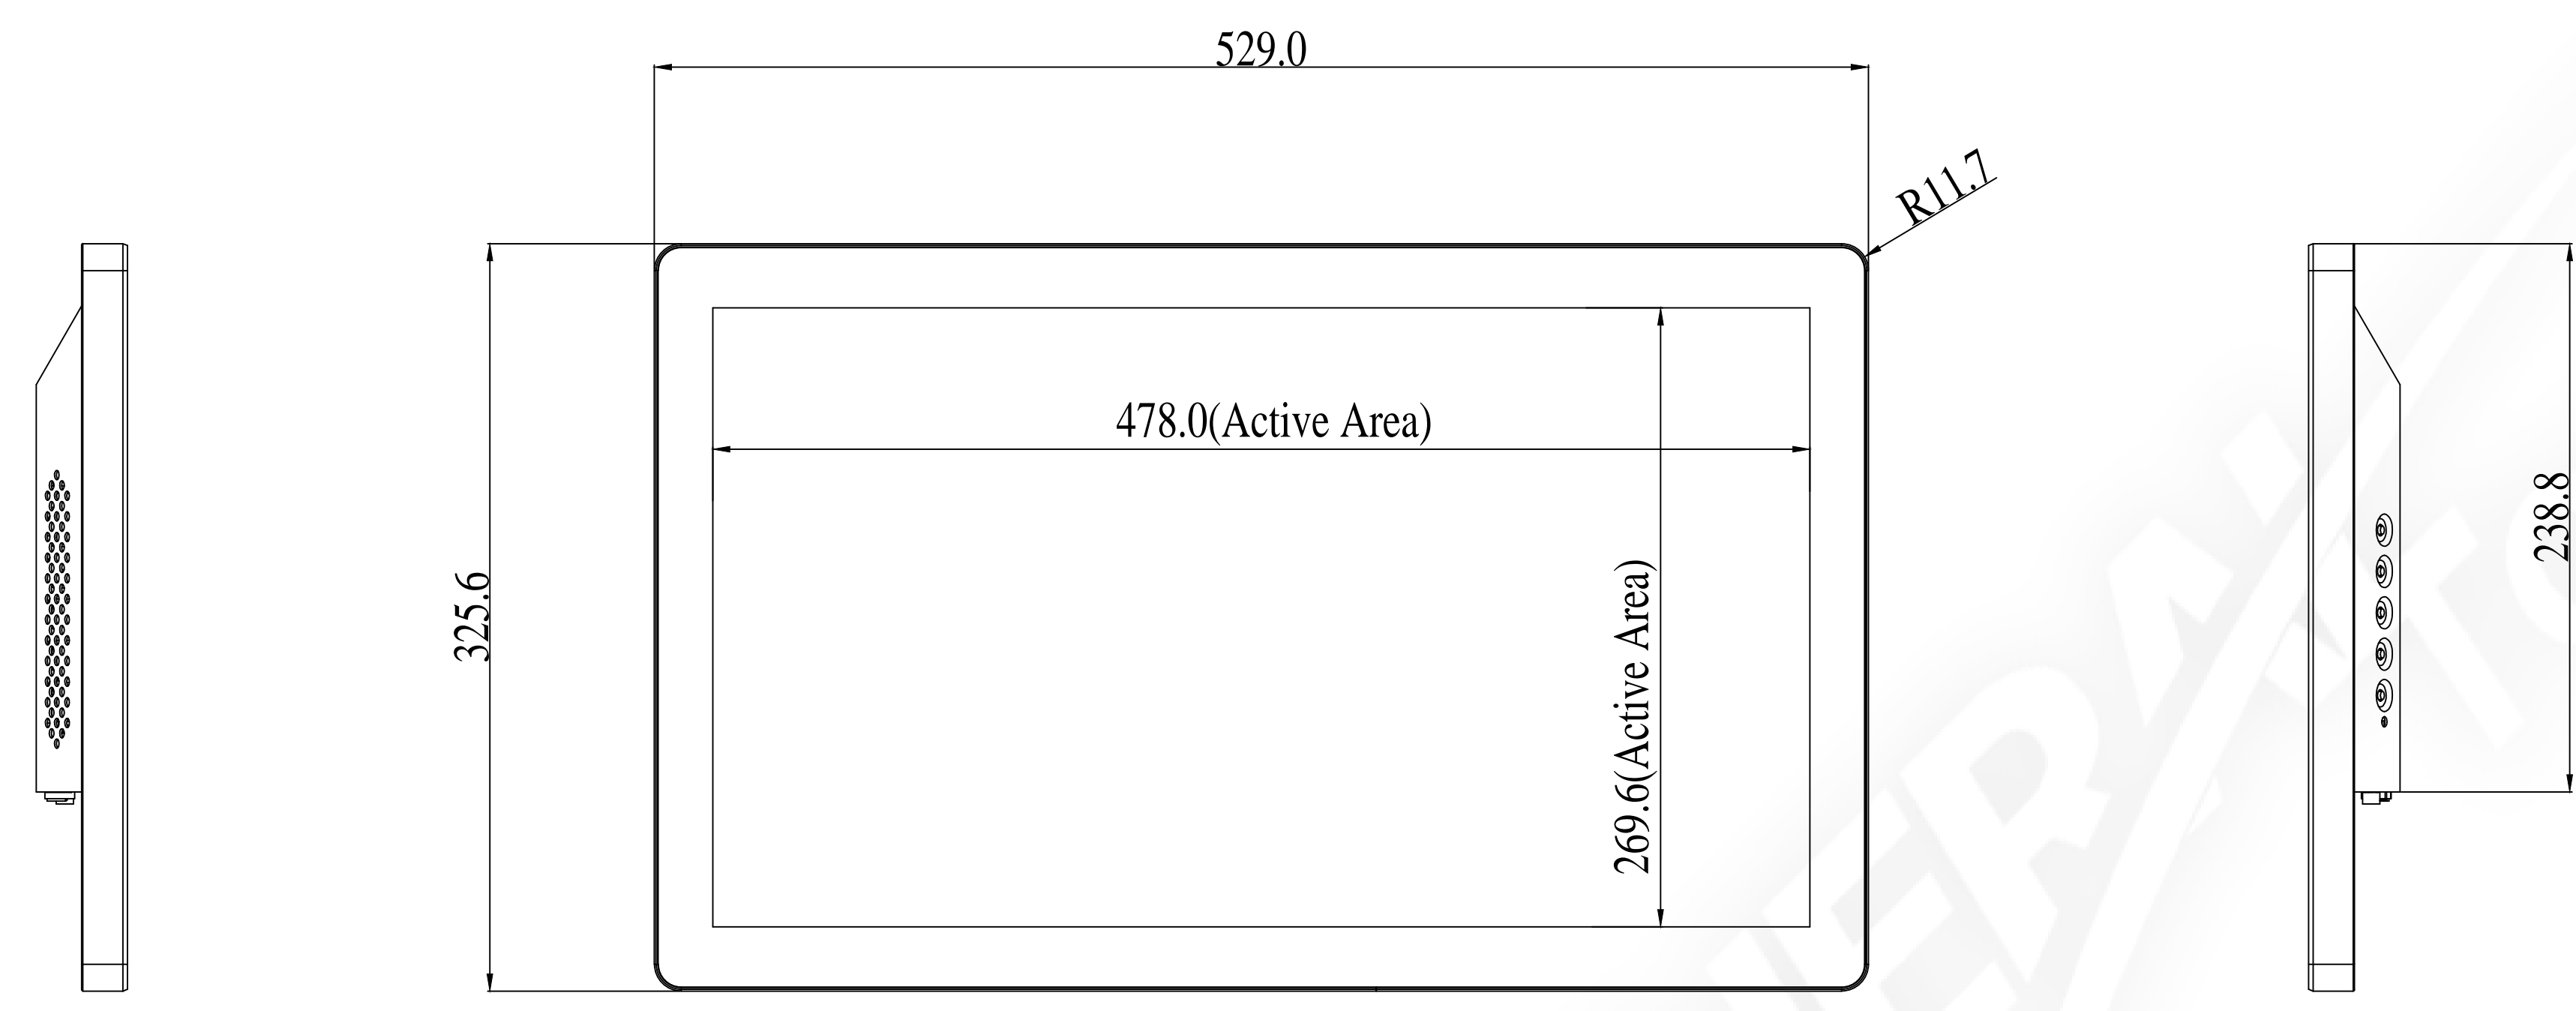


# Title: OTL225-RC5A00-UH2200-1.0

Mark	Revised Contents	Signature
△		

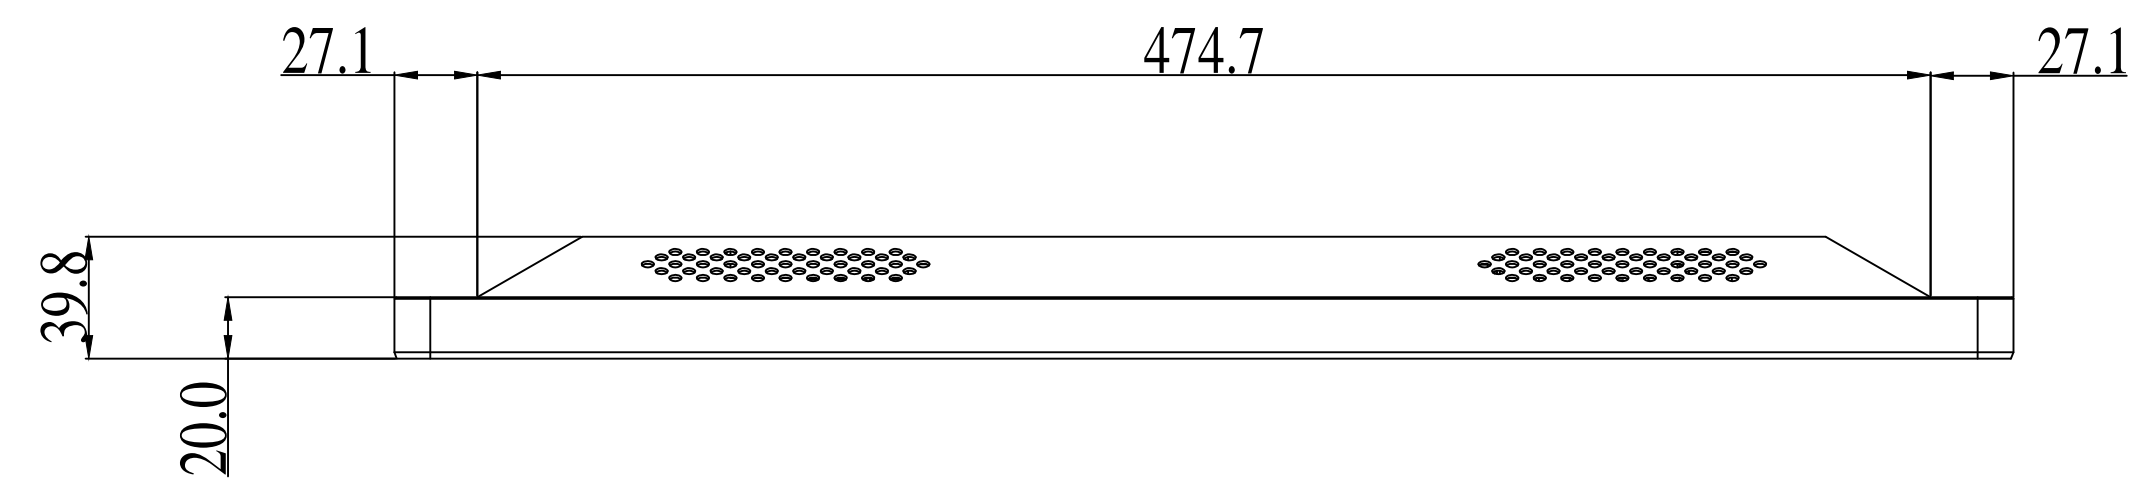

M4 Threads, X8  
Max Screw Depth=6mm  
From Mounting Surface

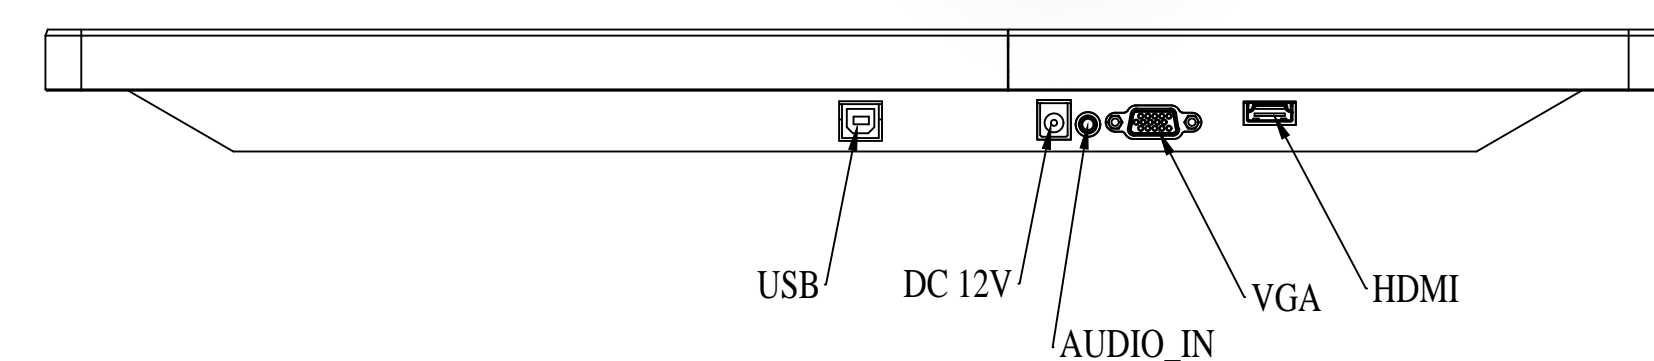

**ALL DIMENSIONS ARE IN MILLIMETERS**

<b>GENERAL Touch</b>		GeneralTouch Co., Ltd.					
Specification	External Dimensions	529.0*325.6*39.8	Anti-Glare	Y <input type="checkbox"/> N <input checked="" type="checkbox"/>	Designer:		
Unit	Date	Active Area	DustProof	Y <input type="checkbox"/> N <input checked="" type="checkbox"/>	Zhou Bolin		
mm	2021/07/15	Glass Thickness			Checked By:		
Projection:		Silk Print Color			Wang Zhenghua		
		Mounting	VESA <input checked="" type="checkbox"/> Bracket <input type="checkbox"/>		Approved By:		
Sheet 1 of 1		Notes			Zhou Bolin		
VER: 0.2	Scale: 1:1	Touch Technology	P-CAP <input checked="" type="checkbox"/> SAW <input type="checkbox"/>	IR/PIT <input type="checkbox"/> Resistive <input type="checkbox"/>			
Tolerance: ±1.0mm			Non-Touch <input type="checkbox"/>				