
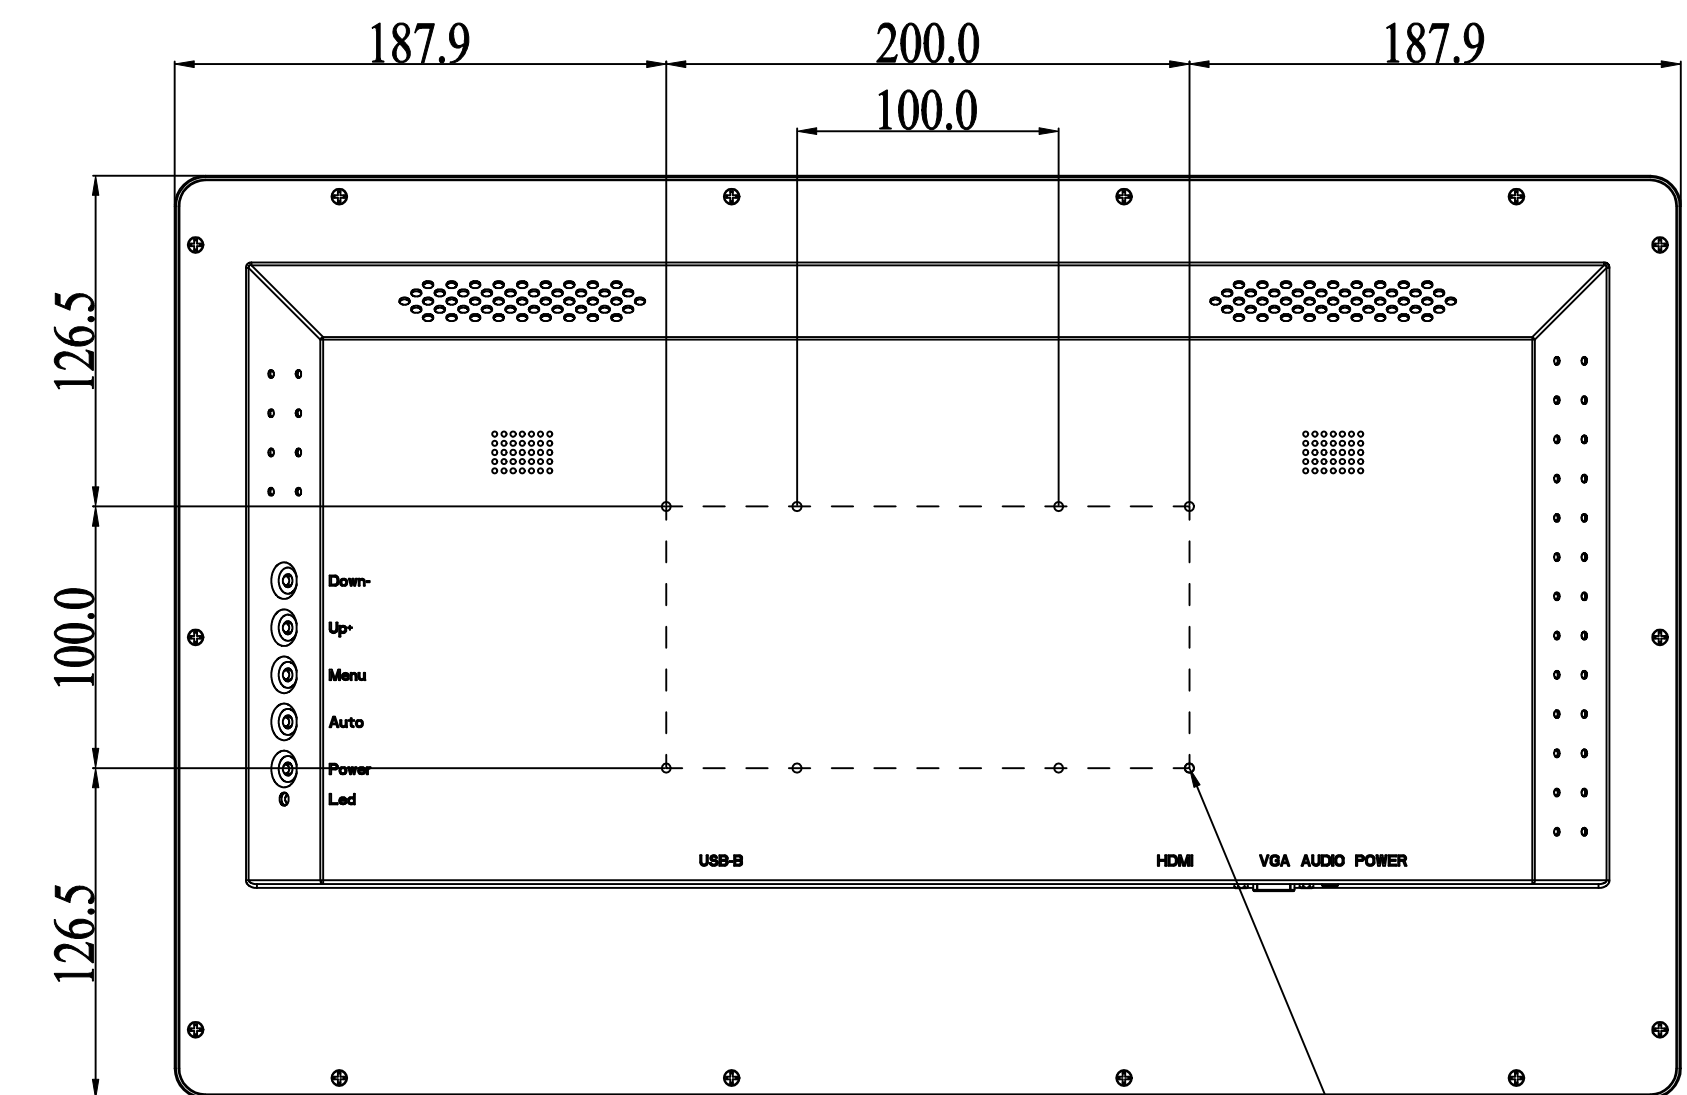


Title: OTL245-RC5000-UH4200-2.0

| | | |
|------|------------------|-----------|
| Mark | Revised Contents | Signature |
| △ | | |
| | | |

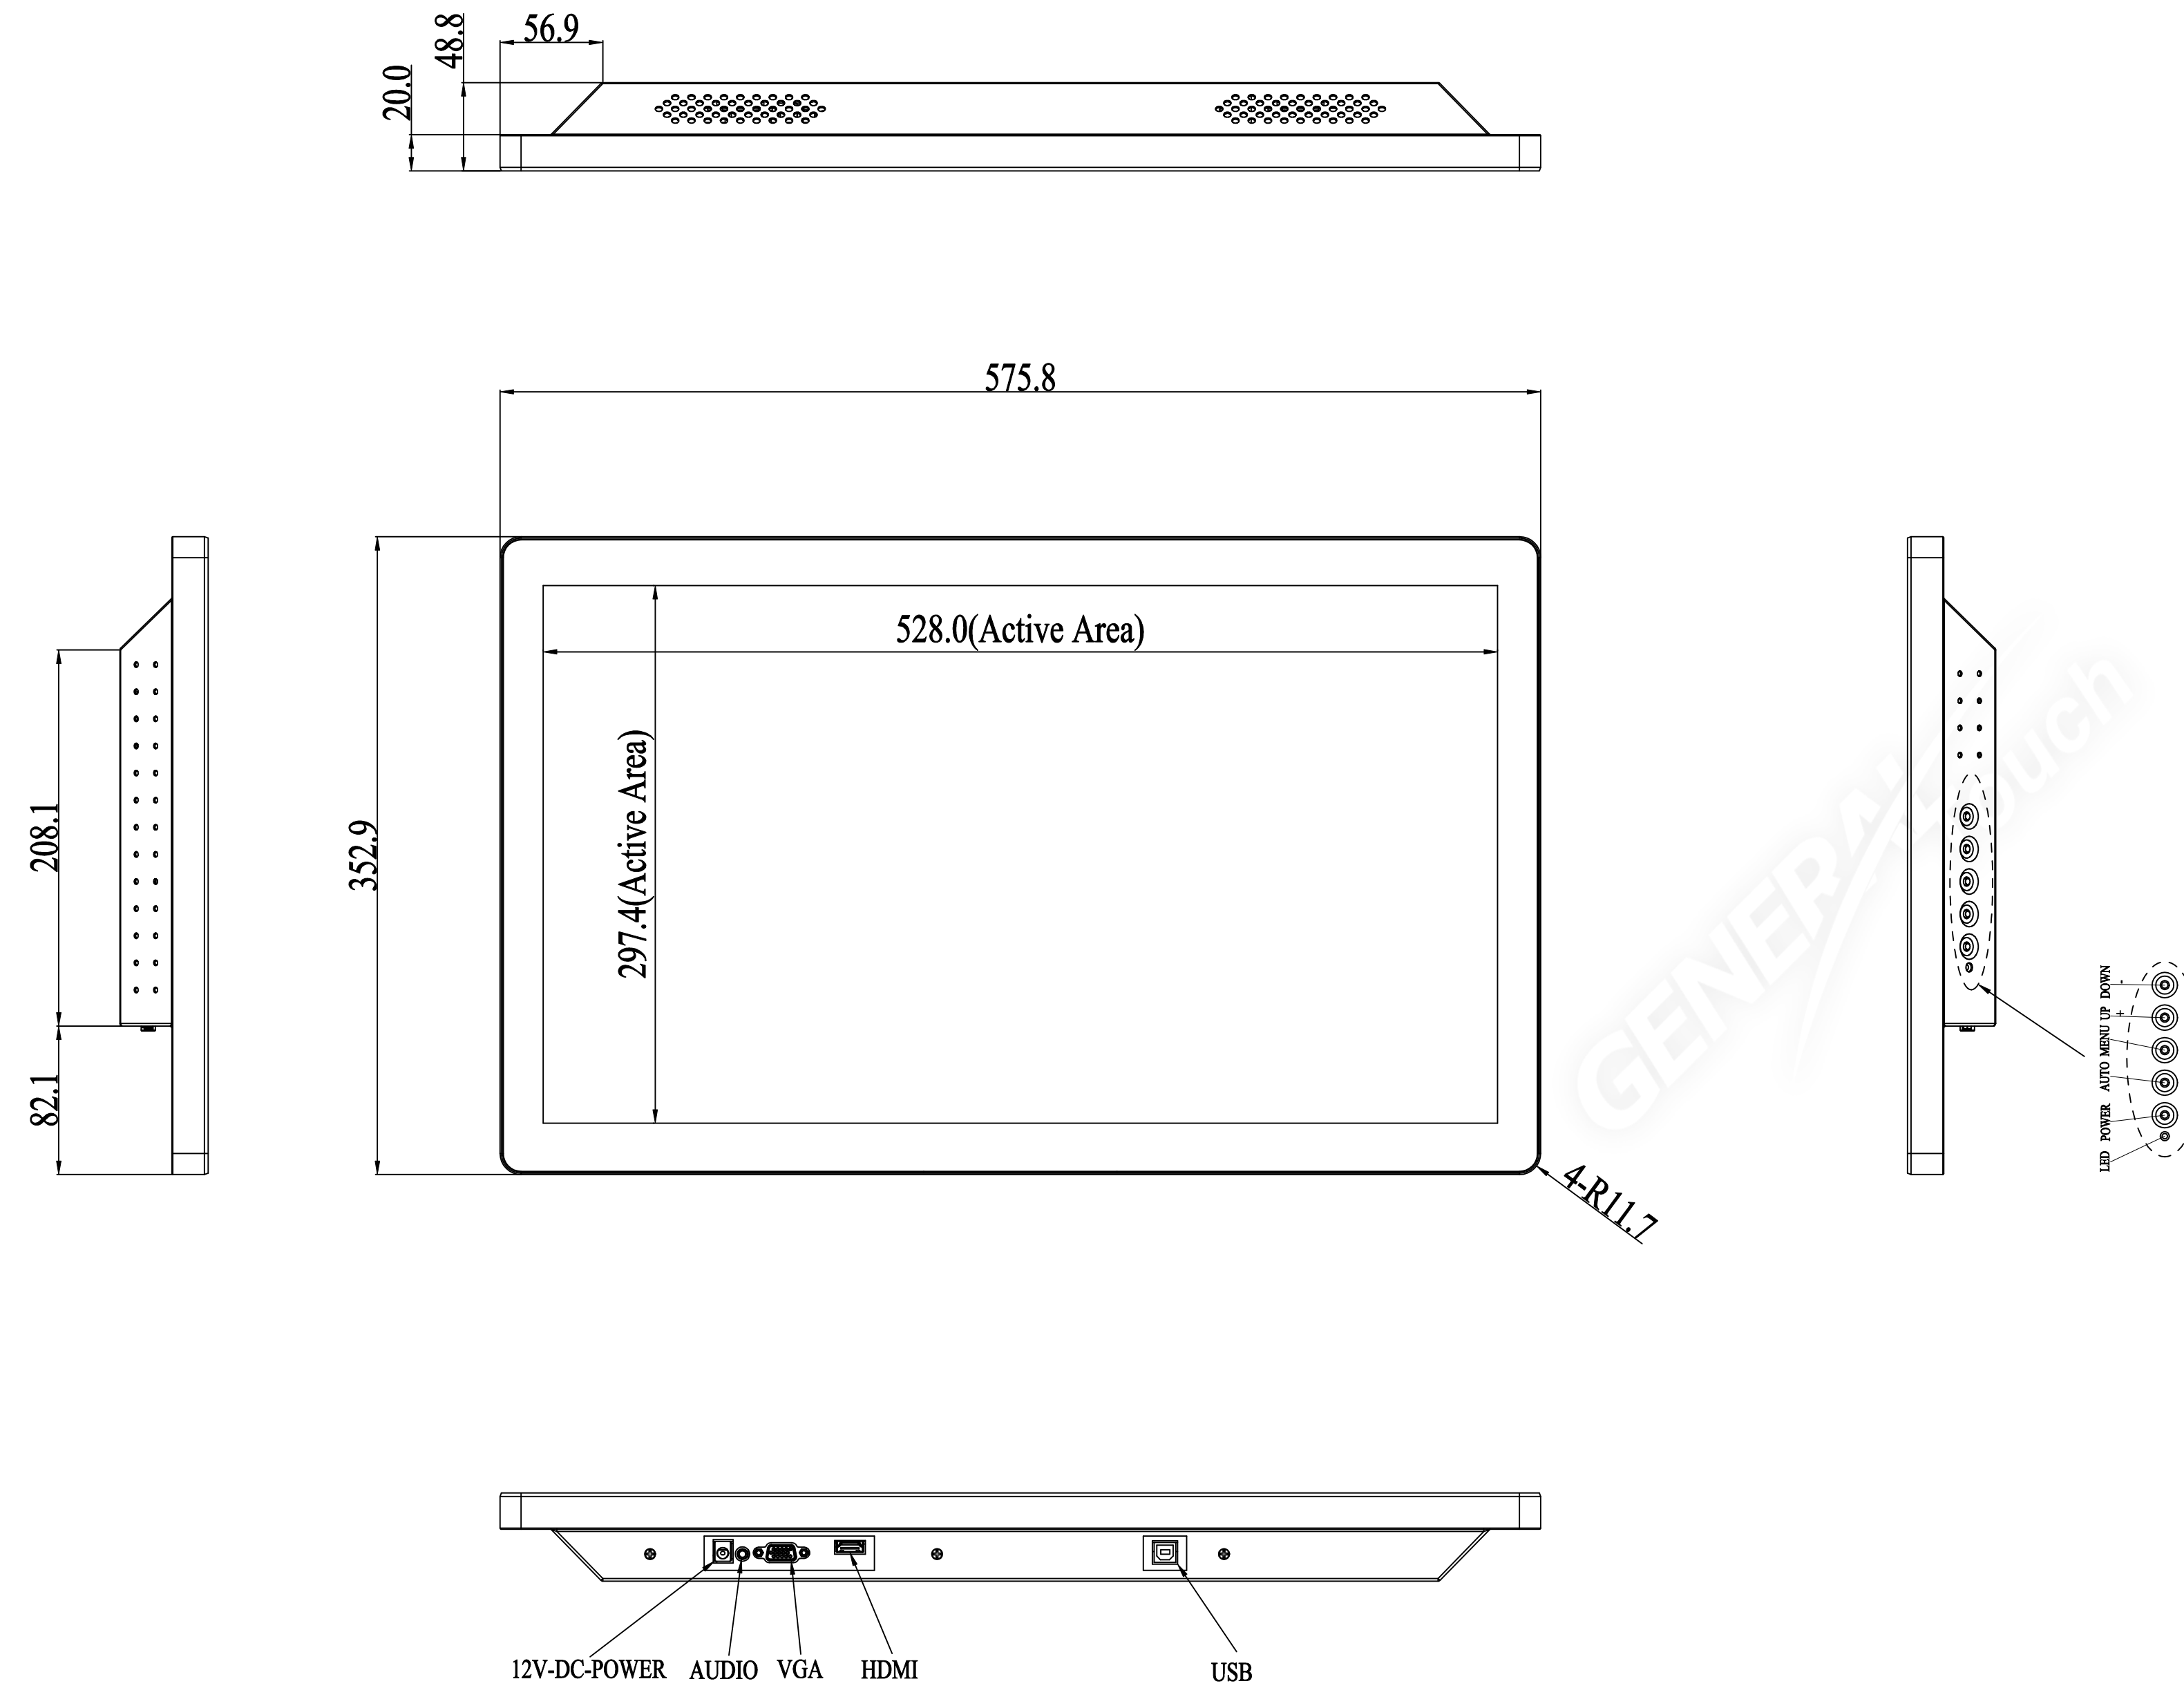

M4 Threads, X8
Max Screw Depth=6mm
From Mounting Surface

ALL DIMENSIONS ARE IN MILLIMETERS

| | | | | | | | |
|----------------------|---------------------|------------------------|--|--|--------------|--|--|
| GENERAL Touch | | GeneralTouch Co., Ltd. | | | | | |
| Specification | External Dimensions | 575.8*352.9*48.8 | Anti-Glare | Y <input type="checkbox"/> N <input checked="" type="checkbox"/> | Designer: | | |
| Unit | Date | Active Area | DustProof | Y <input type="checkbox"/> N <input checked="" type="checkbox"/> | Deng Hang | | |
| mm | 2024/03/26 | Glass Thickness | | | Checked By: | | |
| Projection: | | Silk Print Color | | | Han Jing | | |
| | | Mounting | VESA <input checked="" type="checkbox"/> | Bracket | Approved By: | | |
| Sheet 1 of 1 | | Notes | | | Zhou Bolin | | |
| VER: 0.2 | Scale: 1:1 | Touch Technology | P-CAP | <input checked="" type="checkbox"/> | SAW | | |
| Tolerance: ±1.0mm | | | IR/PIT | | Resistive | | |
| | | | Non-Touch | | | | |