

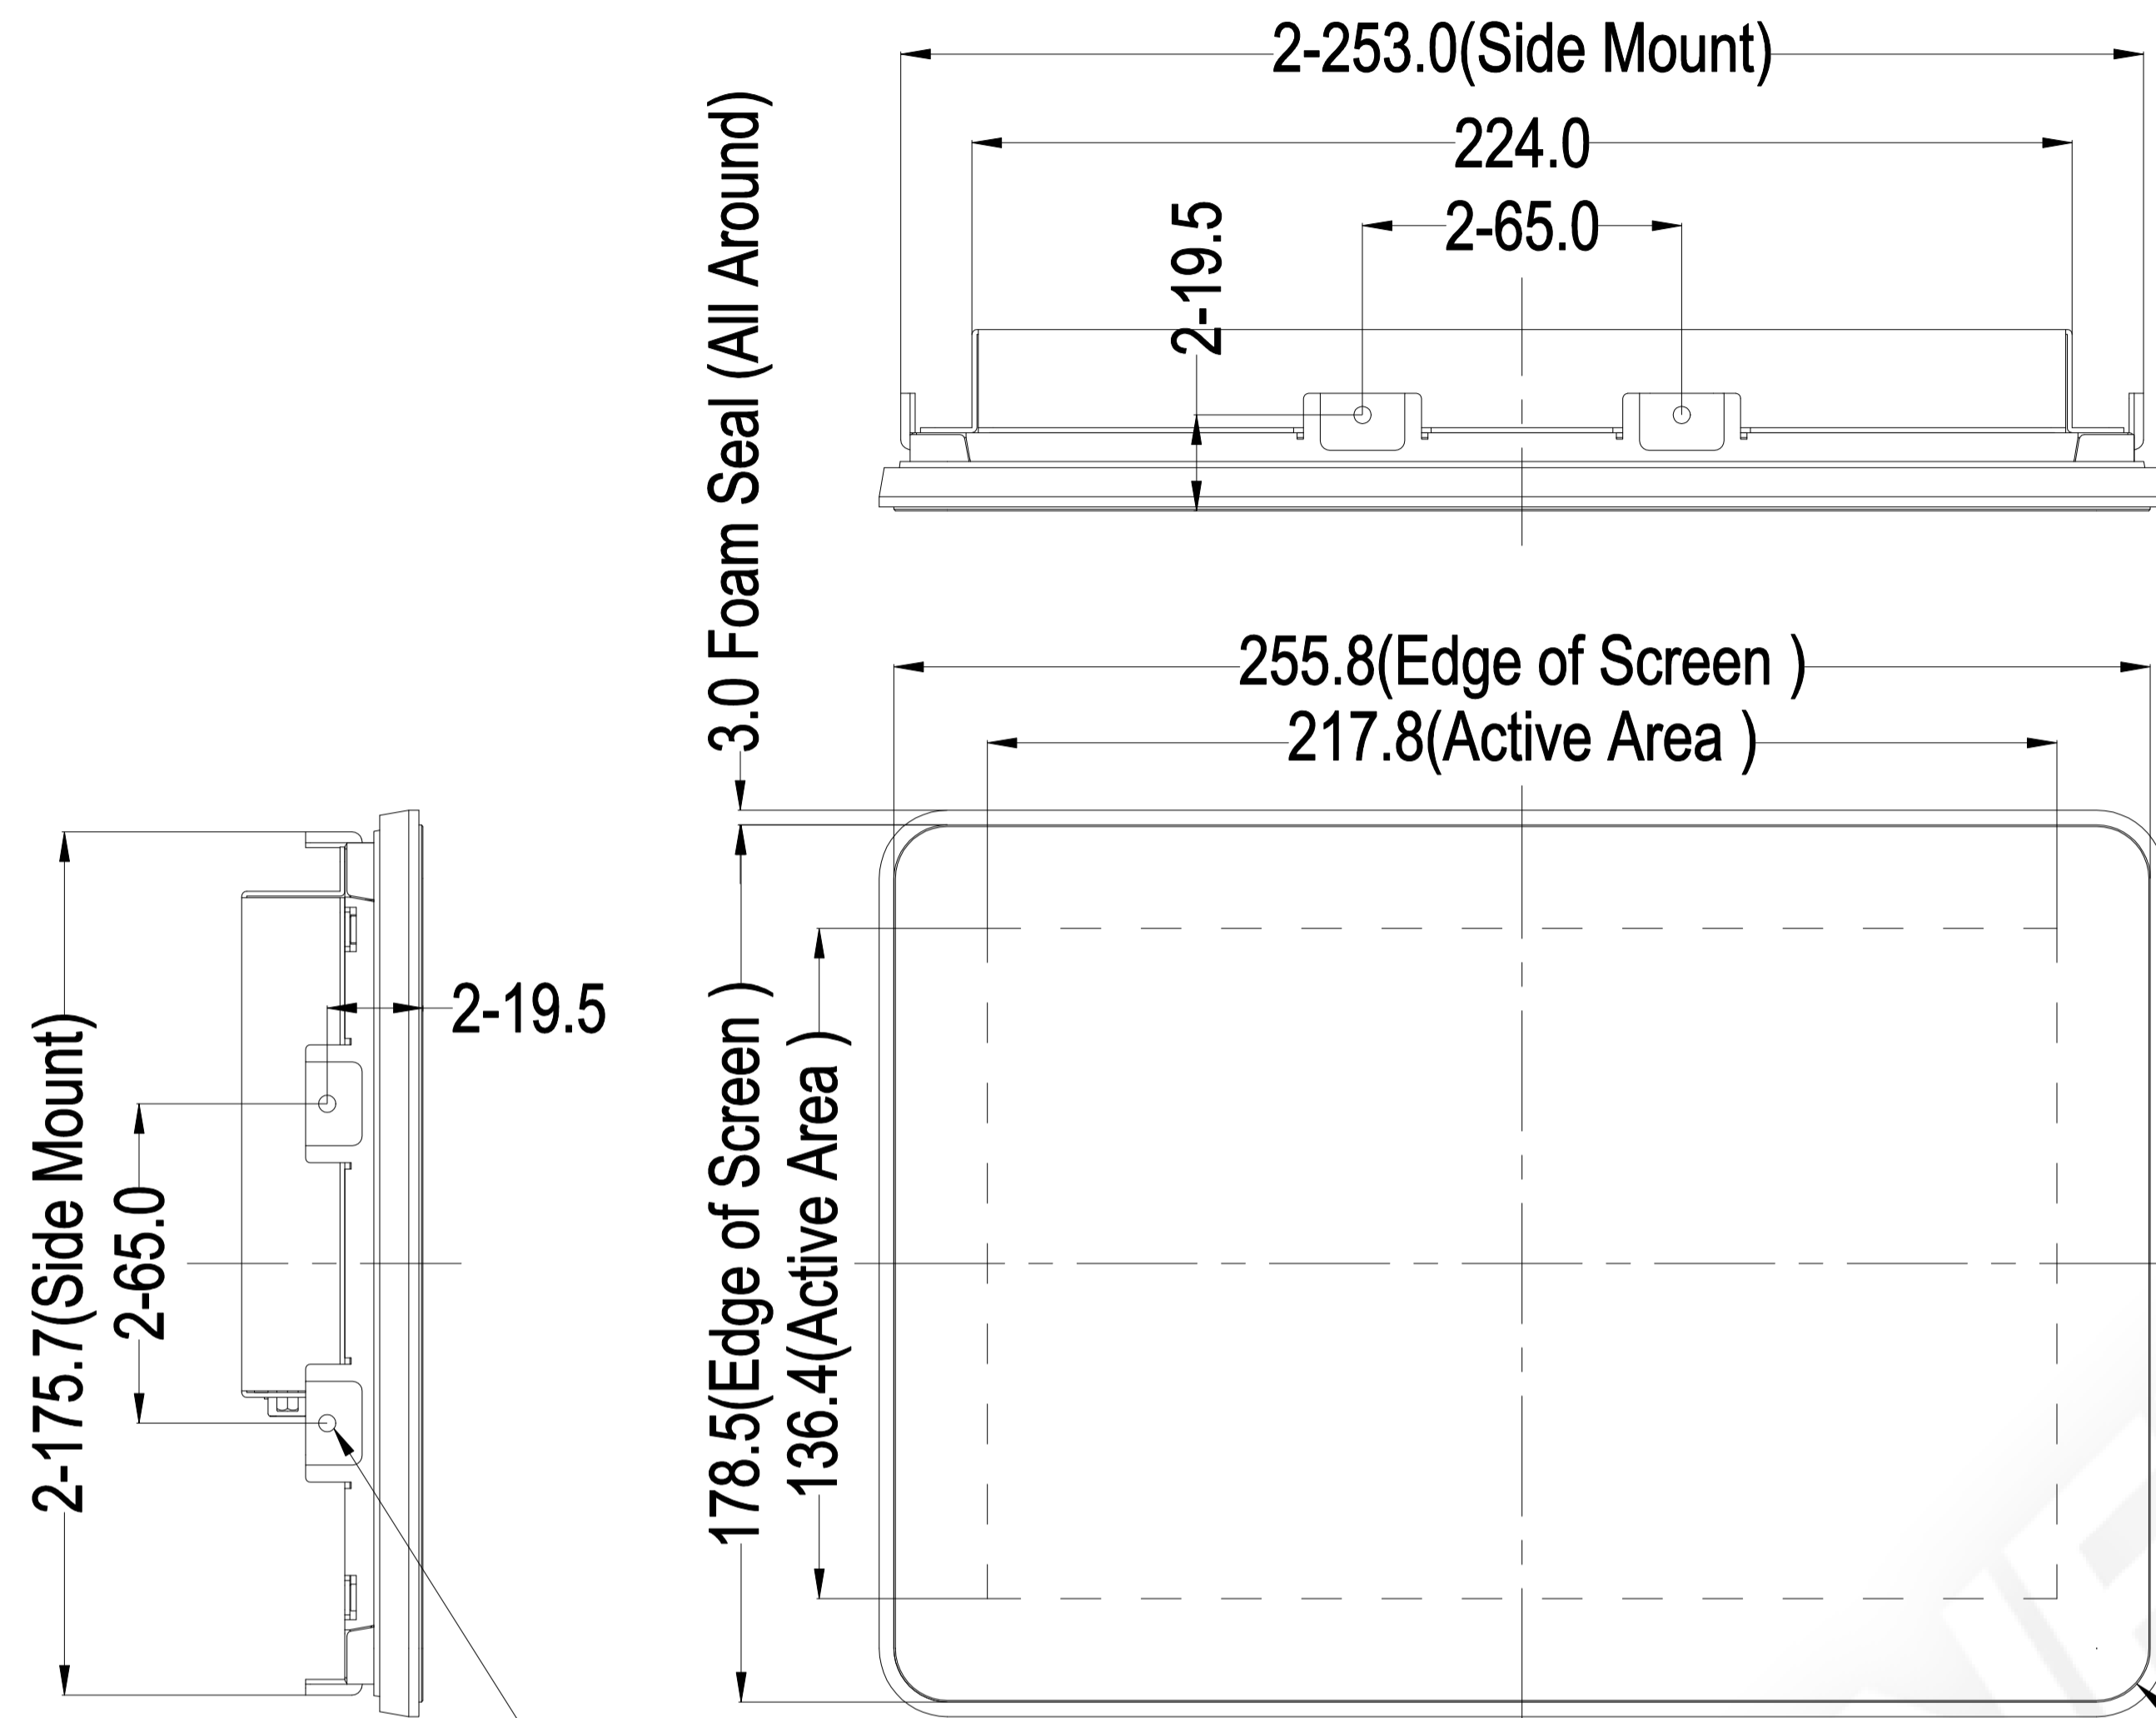
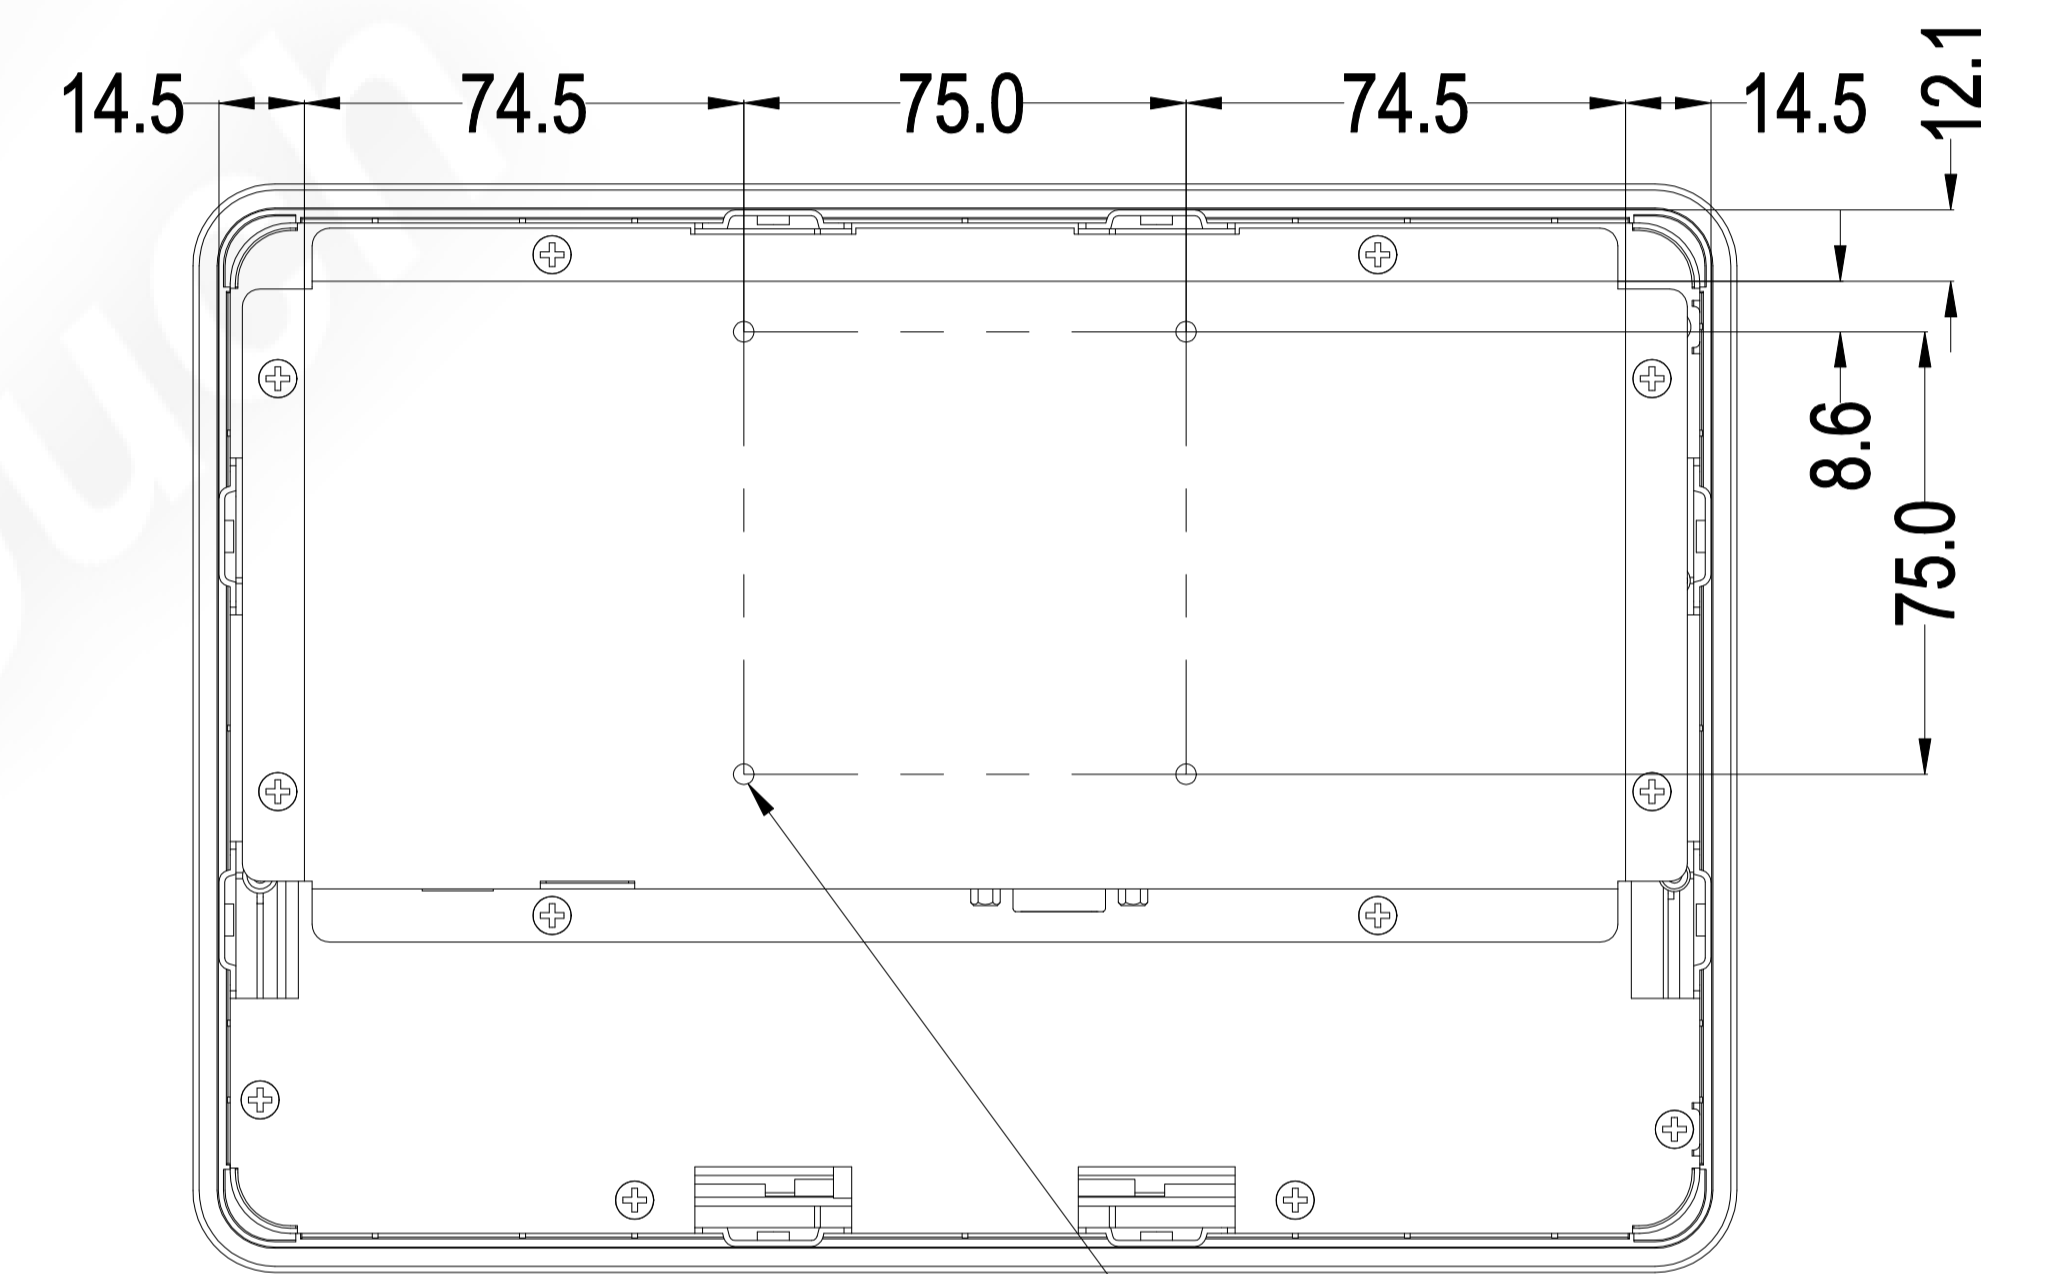


TITLE: RTL106-RC4000-UD5A00-1.0 ROHS


Mark	Revised Contents	Signature
⚠		

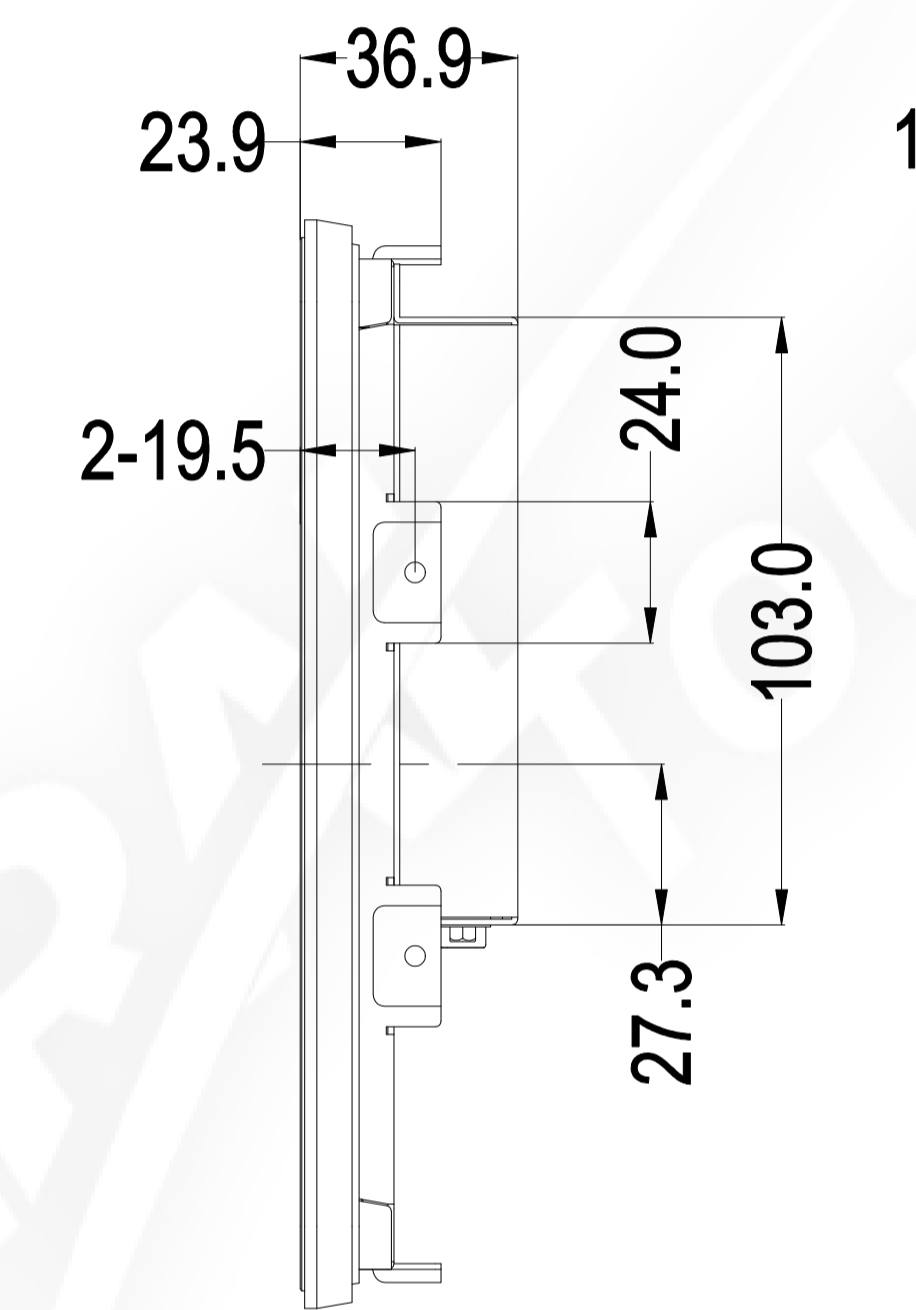

M4 Threads, X8
Max Screw Depth=8mm
From Mounting Surface

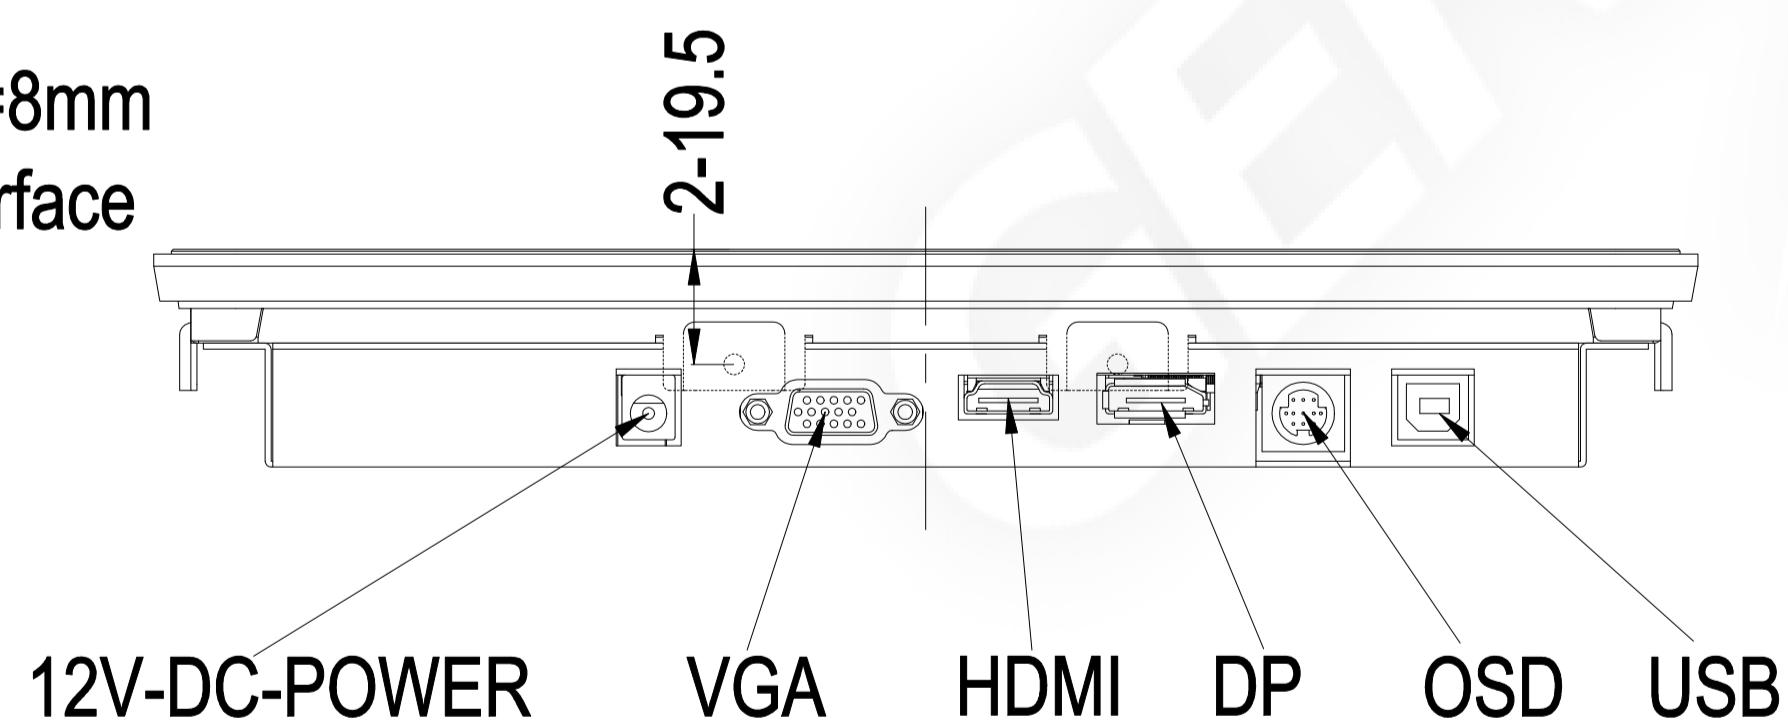

M4 Threads, X4
Max Screw Depth=6mm
From Mounting Surface

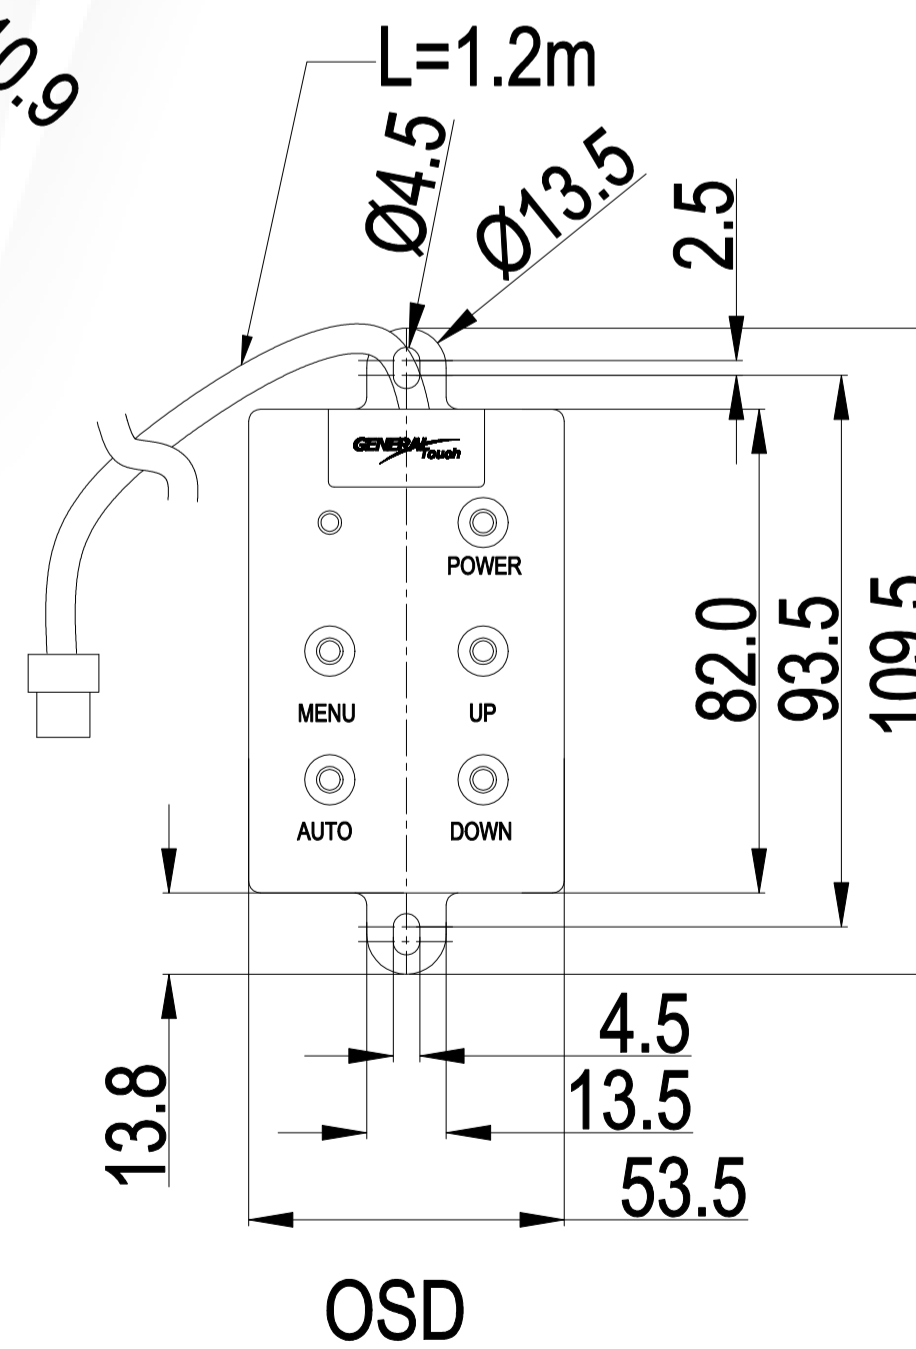

ALL DIMENSIONS ARE IN MILLIMETERS

GENERAL Touch		GeneralTouch Co., Ltd.			
Specification	External Dimensions	261.8*184.5*36.9	Anti-Glare	Y <input type="checkbox"/> N <input checked="" type="checkbox"/>	Designer: Han Jin
Unit	Date	Active Area	DustProof	Y <input type="checkbox"/> N <input checked="" type="checkbox"/>	
mm	2022/04/12	Glass Thickness			Checked By: Wang Zhenghua
Projection:		Silk Print Color			
Sheet 1 of 1		Mounting	VESA <input checked="" type="checkbox"/> Bracket <input type="checkbox"/>		Approved By: Zhou Bolin
VER: 0.1	Scale: 1:1	Notes			
Tolerance: ±1.0mm		Touch Technology	P-CAP <input checked="" type="checkbox"/> SAW <input type="checkbox"/>	IR/PIT <input type="checkbox"/> Resistive <input type="checkbox"/>	
			Non-Touch <input type="checkbox"/>		